


CHAUVIN
ARNOUX

PYROCONTROLE




SENSORS CATALOGUE

TEMPERATURE MEASUREMENT IN INDUSTRIAL ENVIRONMENTS

Measure up




SENSORS FOR EXPLOSIVE ATMOSPHERES

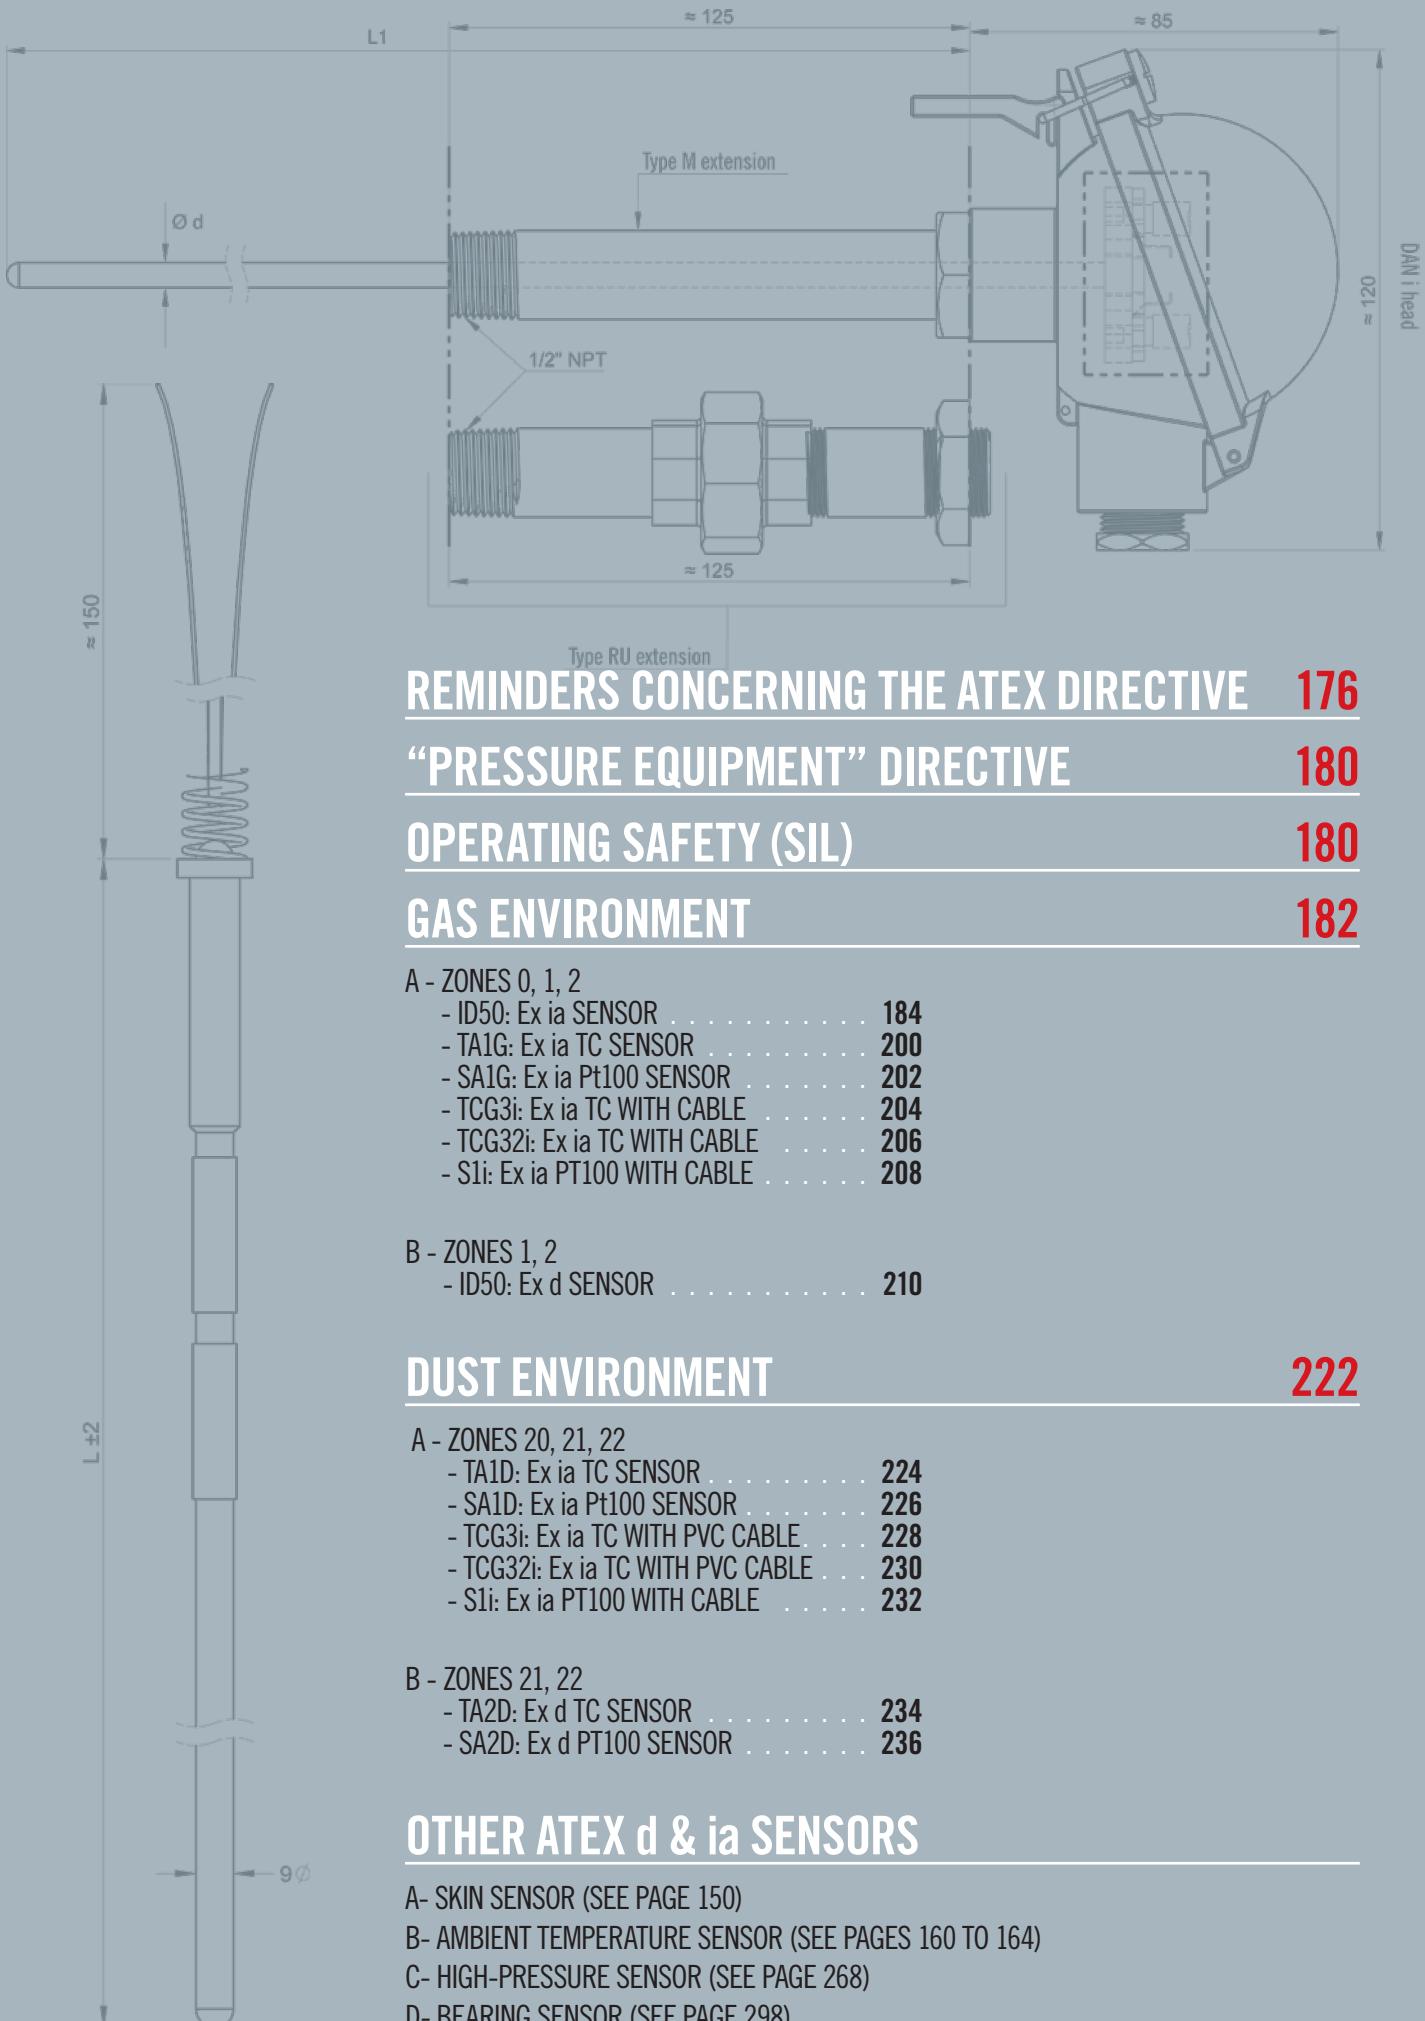

A - THE ATEX 2014/34/EU DIRECTIVE



An explosive atmosphere (**ATEX**) is a mixture, in atmospheric conditions, of inflammable substances in gas, vapour or dust form with air, in which, after inflammation, combustion propagates to the whole of the unburned mixture.

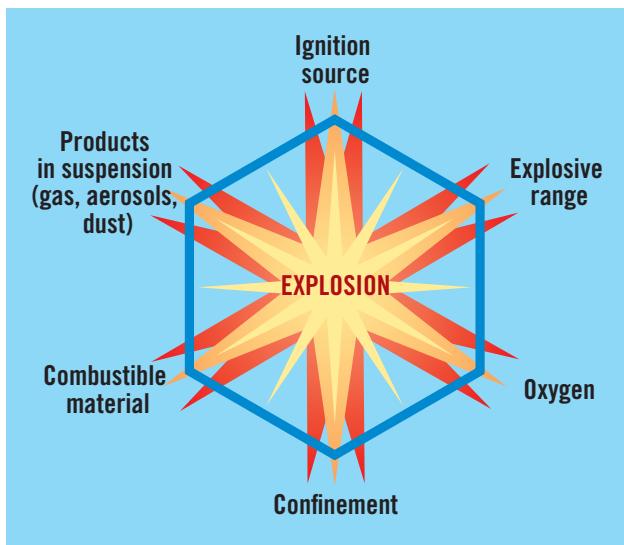

Directive 2014/34/EU, which is a revision of directive 94/9/CE, was published in the official bulletin of the European Union on 29th March 2014. It has been mandatory since 20th April 2016. The texts for transposition into French law have been published:

- Decree no. 2015-799 of 1st July 2015 concerning hazardous products and equipment
- Decree of 1st July 2015 concerning organizations authorized to perform conformity assessments and in-service monitoring operations on hazardous products and equipment

Directive 2014/34/EU applies equally to electrical and mechanical equipment. It explicitly covers the instruments and protective systems used in an ATEX atmosphere, as well as the safety, control and adjustment systems, even if they are not in contact with an ATEX atmosphere, as long as they are necessary for or contribute to operation on instruments and protective systems.

Temperature measurements in explosive zones are covered by this directive.

1 - GLOSSARY

Explosive atmosphere: Defined as a mixture of inflammable substances in gas, vapour, mist or dust form...

- With air;
- In atmospheric conditions;
- In which, after inflammation, combustion propagates to the whole of the unburned mixture.

Explosive atmosphere: Atmosphere liable to become explosive.

Ignition source: Inherent to the equipment concerned, a specific feature whose activation constitutes a risk of ignition. A distinction must be made between these two concepts during risk analysis. The possible ignition sources are listed in EN 1127-1. On a site transforming combustible materials, and in the presence of oxygen in the ambient air, the ignition source is the only element which can easily be eliminated to prevent an explosion. 13 ignition sources are identified in EN 1127-1.

Normal operation: Situation which exists when the equipment, protective systems and components fulfil their planned function in the context of their design parameters. Small leaks may be part of normal operation. Failures requiring repairs or shutdown are not considered to be part of normal operation.

Dysfunction: Situation which exists when the equipment, protective systems and components do not fulfil their planned function and may generate an ignition source. A foreseeable dysfunction is one which we know through experience may occur during the product's life span. A rare dysfunction only occurs exceptionally.

2 - DETERMINATION OF THE ZONES

The site manager is responsible for classification of the zones in which an **ATEX** atmosphere may form. This classification depends on the probability of **ATEX** atmosphere formation and determines the category of equipment installed there. The equipment manufacturer is not responsible for imposing the right equipment category, but it has a duty to inform its customers of the applicable regulations. The zones are defined according to the type and the probability of it encountering such an atmosphere. There are 3 levels of classification for ATEX zones, depending on the clearance for the source of combustible material and the type of ventilation in place. A distinction is made between zones containing gas or vapour and zones where dust is present.

GASES / VAPOURS / MISTS	
Zone 0	Explosive atmosphere present continuously or for long periods in normal operation. 1000 hours/year = constant, long-term or frequent hazard
Zone 1	Explosive atmosphere present occasionally in normal operation Between 10 and 100 hours/year or more = occasional hazard
Zone 2	Explosive atmosphere present accidentally, in the event of dysfunction or for short periods Less than 10 hours/year = rare or short-term hazard
DUSTS	
Zone 20	Explosive atmosphere present continuously or for long periods in normal operation. 1000 hours/year = constant, long-term or frequent hazard
Zone 21	Explosive atmosphere present occasionally in normal operation Between 10 and 100 hours/year or more = occasional hazard
Zone 22	Explosive atmosphere present accidentally, in the event of dysfunction or for short periods Less than 10 hours/year = rare or short-term hazard

3 - GROUPS OF GASES AND DUSTS

In the ATEX framework, a reference gas corresponds to each group of gases. These groups are based on their ignition characteristics.

GROUP	REFERENCE GAS	GAS DANGER LEVEL
IIA	Propane	++
IIB	Ethylene	+++
IIC (the most dangerous)	Hydrogen/Acetylene	++++

Dusts are also classified in 3 groups of explosive gases.

GROUP	TYPE OF DUST	DUST DANGER LEVEL
IIIA	Combustible fibres	+
IIIB	Non-conductive dust	++
IIC (the most dangerous)	Conductive dust	+++

4 - DEFINITION OF THE EQUIPMENT CATEGORIES

GROUPS I AND II

The equipment and protective systems are divided into two groups:

- **Group I:** equipment intended for use in the underground and surface parts of mines which may be endangered by firedamp and/or inflammable dust.
- **Group II:** equipment intended for use in surface industries which may be endangered by explosive atmospheres.

We do not propose any products classified in Group I. We will therefore only deal with equipment in Group II.

CATEGORIES IN GROUP II

- **Category 1:** Equipment in this category is characterized by at least two protective systems against explosion risks, operating in such a way that, if one of the protective systems fails, at least one independent secondary system ensures sufficient protection. This equipment is designed to operate in zones 0 or 20.

• **Category 2:** The anti-explosion protective systems for equipment in this category must operate in a way that ensures a sufficient level of protection against explosion risks even in the event of foreseeable dysfunctions. This equipment is designed to operate in zones 1 or 21.

• **Category 3:** The design of the equipment in this category must ensure a sufficient level of anti-explosion protection in normal operation. This equipment is designed to operate in zones 2 or 22.

The equipment categories in Group II should be used as follows:

G : Gas

D : Dust

ZONE	EQUIPMENT CATEGORY
0	1G, (1)G
1	2G, (2)G (or 1G, (1)G)
2	3G, (3)G (or 1G and 2G, (1)G and (2)G)
20	1D, (1)D
21	2D, (2)D (or 1D, (1)D)
22	3D, (3)D (or 1D and 2D, (1)D and (2)D)

• Use in the hazardous zone: Category 1G

• Installation in safe zone. Transmits or receives a signal from to the hazardous zone: Category (1)G

If you wish to use equipment in zone 0, its category must be 1G. Only this category is authorized in this zone.

For zone 2, equipment in Category 3G is authorized, along with equipment in Categories 1G and 2G: what can do more can also do less.

Equipment in the xGD categories can be used in explosive Gas and Dust atmospheres.

5 - TEMPERATURE CLASSES

Below, we present the different **ATEX temperature classes**, applicable to **ATEX** atmospheres, with limitation rules which differ according to the temperatures. These temperature ranges (T1 to T6) can then be used to classify the equipment intended for installation or use in **ATEX** zones.

The self-ignition temperature indicated for a combustible product (gas, vapour, dust) is the temperature at which the mixture with air **spontaneously ignites**. There is no need to provide a specific ignition source (flame, spark, electric arc, etc.) because the temperature is sufficient to set fire to the mixture.

Manufacturers commit to a temperature for their equipment by means of **the temperature classes**. If the equipment is in temperature class T2, the manufacturer guarantees that the surface temperature of its equipment will never exceed 300°C in the conditions indicated.

The maximum admissible surface temperature must always be lower than the self-ignition point.

TEMPERATURE CLASSES

Maximum admissible surface temperature	Equipment marking
450°C	T1
300°C	T2
200°C	T3
135°C	T4
100°C	T5
85°C	T6

TABLE SUMMARIZING THE CORRESPONDENCE BETWEEN GAS GROUPS AND TEMPERATURE CLASSES:

	CLASSIFICATION OF GASES AND VAPOURS IN GAS GROUPS AND TEMPERATURE CLASSES				
	T1	T2	T3	T4	T6
I	Methane				
II A	Acetone, ethane, ethyl acetate, ammoniac, benzol, acetic acid, carbon monoxide, methanol, propane, toluene	Ethyl alcohol, i-amyl acetate, n-butane, n-butyl alcohol	Gasoline, diesel oil, kerosene, domestic fuel oil, n-hexane	Acetic acid, ether	
II B	City gas	Ethylene			
II C	Hydrogen	Acetylene			Carbon disulphide

TEMPERATURE LIMITATION RULES

For dusts: the temperature is part of the Ex Dust marking.

- **Dust clouds:** If a dust cloud occurs, the maximum surface temperature of the equipment must not exceed 2/3 of the ignition temperature under any circumstances: Max. temperature (C°) = 2/3 of the ignition temperature of a dust cloud (Tci)
- **Dust layers:** The temperature must be limited if there is a layer of dust present less than 5 mm thick: Max. temperature = 5 mm – 75 k (75 k is the safety coefficient equal to 75°C)

EXAMPLES OF EXPLOSIBLE DUSTS

Acetylsalicylic acid, ascorbic acid, aluminium, starch (wheat), asphalt, wheat, cocoa, cellulose, flour / bread wheat, powdered milk, malt, paracetamol, polystyrene, soap, soya (flour), sugar, etc.

NOTES

- On DUST-certified ATEX products, the maximum surface temperature is indicated in plain language in the Dust marking on the label. This should not be confused with the temperature class (T1 to T6) which only concerns gases and vapours!
- Do not confuse the maximum surface temperature of dust-certified equipment (e.g. T85 °C) or the temperature class of gas-certified equipment (e.g. T4) with the admissible ambient temperature for the equipment. These are distinct characteristics.

	IFA / INRS IDENTIFICATION NO.	DUST CLOUD		5 MM DUST LAYER		
		SELF-IGNITION TEMPERATURE T1	EQUIPMENT SURFACE TEMPERATURE (2/3 OF T1)	SELF-IGNITION TEMPERATURE T2	EQUIPMENT SURFACE TEMPERATURE (T2-75°C)	MAX. SURFACE TEMPERATURE TO USE WHEN CHOOSING THE EQUIPMENT
Wheat in bulk	3466	490 °C	326 °C	290 °C	215 °C	215 °C
Cocoa powder	3469	590 °C	393 °C	250 °C	175 °C	175 °C
Wheat starch	3525	380 °C	253 °C	530 °C	455 °C	253 °C
Powdered milk	2046	460 °C	306 °C	330 °C	255 °C	255 °C
Soya flour	1264	430 °C	286 °C	420 °C	345 °C	286 °C
Sulphur	2535	240 °C	160 °C	250 °C	175 °C	160 °C
Charcoal	254	520 °C	346 °C	320 °C	245 °C	245 °C
Sugar, pectin	232	410 °C	273 °C	380 °C	305 °C	273 °C

Source: GESTIS-CARATEX databank

6 - PROTECTION MODES

There are several protection modes recognized by the IEC (International Electrotechnical Commission) and CENELEC (Comité Européen de Normalisation Electrotechnique / European Committee for Electrotechnical Standardization). Each protection mode is symbolized by lower-case letters which figure on the equipment's

ATEX label. Several protection modes may be used on the same equipment. If so, the symbols concerned are indicated one after the other (e.g. Ex db eb op is q IIC T4 Gb).

The most widely-used protection modes for Pyrocontrole's temperature sensors are "ia" (intrinsic safety) and "d" (explosion-proof enclosure).

MAIN PROTECTION MODES FOR ELECTRICAL EQUIPMENT

Type	Symbol	Protection Mode	Group	Equipment Category	Equipment Protection Level (EPL)	CENELEC / IEC Standards	Principle of Protection
d	da	explosion-proof enclosure	II	1 G	Ga	60079-1	Parts which may ignite an explosive atmosphere are enclosed in an enclosure which must withstand an internal explosion and prevent propagation of the explosion outside it.
	db			2 G	Gb		
	dc			3 G	Gc		
e	eb	increased safety	II	2 G	Gb	60079-7	Steps are taken from the design phase onwards to avoid any internal overheating and any electric arcs or sparks inside or on the external parts of electrical equipment.
	ec			2 D	Db		
i	ia	intrinsic safety	II	1 G	Ga	60079-11	Limitation of electrical energy and internal heating, thus preventing any ignition.
	ib			2 G	Gb		
	ic			3 G	Gc		
nA	nA	non-sparking	II	3 G	Gc	60079-15	Elimination of electric arcs, sparks and internal heating.
nC	nC	sealed unit	II	3 G	Gc	60079-15	Must contain any internal explosion or must prevent the explosive mixture from penetrating inside.
nR	nR	limited respiration	II	3 G	Ga	60079-15	Enclosure designed to limit penetration of the explosive mixture.
m	ma	encapsulated	II	1 G	Gb	60079-18	Exclusion of the explosive atmosphere by encapsulation of the parts in resin.
	mb			2 G	Gb		
	mc			3 G	Gc		
op is	op is	optical radiation with intrinsic safety	II	1 G	Ga	60079-28	Limitation of the light energy produced (e.g. by a LED), to avoid ignition of the surrounding explosive atmosphere.
	op is			2 G	Gb		
	op is			3 G	Gc		
t	ta	protection by enclosure	III	1 D	Da	60079-31	The construction of the equipment prevents any penetration inside by dust.
	tb			2 D	Db		
	tc			3 D	Dc		

7 - PROTECTION RATINGS

	IP INGRESS PROTECTION RATINGS (IEC 60529)	
	SOLID PARTICLE PROTECTION	LIQUID INGRESS PROTECTION
0	Not protection.	
1	Protected against solid bodies larger than 50 mm. Example: involuntary contact with hand.	Protection against dripping water (vertically-falling drops). Example: condensation.
2	Protected against solid bodies larger than 12.5 mm. Example: finger.	Protected against dripping water when the enclosure is tilted by up to (15°).
3	Protected against solid bodies larger than 2.5 mm. Example: tools, wires.	Protected against dripping water when the enclosure is tilted by up to 60 °.
4	Protected against solid bodies larger than 1 mm. Example: small tools, small wires.	Protected against water splashing from any direction.
5	Protected against dust. No harmful deposit.	Protected against water projected by a nozzle from any direction.
6	Protected against penetration by dust (dust-tight).	Protected against water projected in powerful jets similar to heavy sea spray.
7		Protected against the effects of immersion at depths between 0.15 and 1 m.
8		Protected against the effects of prolonged immersion under pressure.

8 - COMPLETE ATEX MARKING

LCIE 14ATEX3020X

Notified body Year of certification ATEX certification Certification number Special conditions of use indicated in the certificate

CE 0081 Ex II 1G Ex ia IIC Ga T4...T6

Regulatory marking Number of notified body ATEX product Category Environment (in this case: Gas) ATEX product Equipment group Protection mode Equipment group Gas group Equipment protection level Temperature class

B - DIRECTIVE NO. 2014/68/EU PRESSURE EQUIPMENT

The European Pressure Equipment Directive (PED) specifies the requirements concerning pressure equipment for the distribution of pressure equipment inside the European economic area. The version currently in force is directive 2014/68/EU of the European Parliament and Council of 15th May 2014 regarding harmonization of the legislation in the member states concerning the commercialization of pressure equipment.

After examining the datasheets from the Pressure Equipment Liaison Committee (CLAP) concerning Directive 2014/68/EU, PYROCONTROLE can inform you that:

- An isolated sensor does not meet the definition of a pressure accessory (Guideline number A-25 – CLAP number X029)

- If a sensor is considered to be a component incorporated in an item of equipment, the requirements must be checked but the marking is not applicable (Guideline number A-22 – CLAP number X027)
- The compliance assessment procedures and the essential safety requirements in PED 97/23/CE are applicable to the whole safety chain (Guideline number A-25 – CLAP number X029)
Consequently, CE marking cannot be placed on an isolated sensor (in the context of the Pressure Equipment Directive).

C - SIL (SAFETY INTEGRITY LEVEL) EN 61508 STANDARD

This standard covers the functional safety of electrical/electronic/programmable electronic systems related to safety. It concerns applications for which a failure of these systems has a significant effect on the safety of people, the environment and the installations.

THE EN 61508 STANDARD:

Some industrial processes may represent a hazard for people, the environment and the installations themselves.

The safety functions are intended to reduce these hazards. SIL involves reducing the risks to a tolerable level. The EN 61508 standard was published to describe both the type of risk assessment necessary and the development of safety functions for the sensors, the logical processing part and the actuators. These measures include “risk suppression” (systematic faults) and “risk control” (random faults). This basic standard, which is independent of the applications, describes the requirements regarding the safety functions of the components and systems, allowing the development of branch-specific standards (e.g. the EN 61511 standard: see below).

THE EN 61511 STANDARD:

This international standard can be used to define the requirements concerning the specifications, design, installation, operation and maintenance of an instrumented safety system, so that it can be implemented with total confidence, thus establishing and/or maintaining the safety of the process at an acceptable level. This standard was designed to constitute an implementation of IEC 61508 in process industries.

PYROCONTROLE proposes “SIL Capable” process sensors by using temperature transmitters compliant with the EN 61508 standard. The performance level may be: SIL 2 Capable or SIL 3 Capable, depending on the type of mounting.

GAS ENVIRONMENT

ZONES 0, 1, 2

PYROmodules id50, a modular solution for the configuration and maintenance of Atex temperature sensors dedicated to temperature measurement


Thanks to a wide choice of references, the PYROmodules id50 system allows you to define a tailored Atex ia/d sensor adapted to your in-line temperature measurement application.

For maintenance of your sensors, the id50 system enables you to replace the faulty part(s) only, whatever the sensor brand, at a competitive price.



✓ ADVANTAGES OF ID50


GUARANTEED ATEX CERTIFICATION



ECONOMICAL SOLUTION



SHORT DELIVERY LEAD TIMES



GUARANTEED SAFETY

The id50 modules system offers numerous protective measures guaranteeing a high level of safety.

+ Atex certification is maintained, even in the event of partial replacement of an existing sensor

+ All the thermowells are the subject of calculation notes in accordance with the ASME PTC- 19.3 TW 2016 standard


+ All the equipment is SIL-certified*
*for any assembly with a TTH200/TTH300 transmitter



ID50 MODULES | TAILORED CONSTRUCTION

With this smart modular solution, you can assemble your Atex ia/d temperature sensor to suit the specific features of your application.

Numerous references are available.

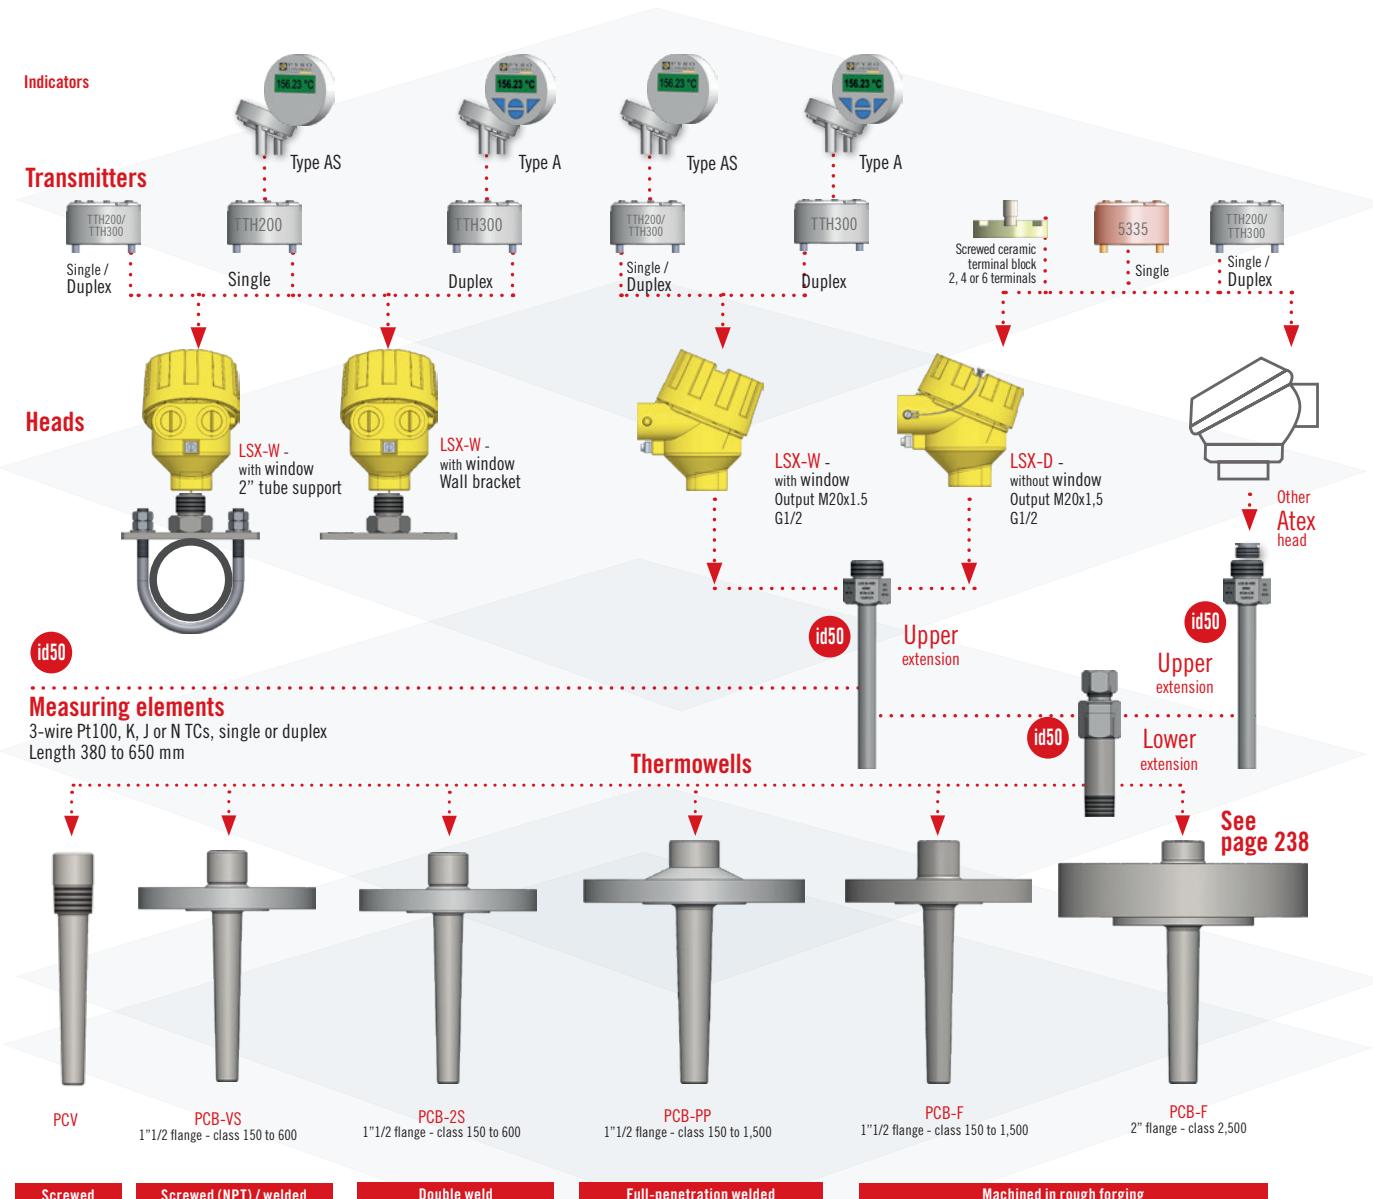

ID50 MODULES | SIMPLIFIED MAINTENANCE WORK

With the id50, modules, change only the faulty part(s) of your sensor and reduce your maintenance costs.



This innovative modular system allows you to replace only the damaged parts



Atex certification maintained

id50 system ADAPTABLE to ALL TYPES and MAKES of Atex sensors for temperature measurement



ID50

COMPLETE ASSEMBLED SENSOR

IP
54

IEC 584-1
OR
IEC60751

Ex ia
and
Ex d



DESCRIPTION

id50 sensor delivered complete and assembled. This sensor comprises the components detailed in the pages which follow. The section presenting the thermowells begins on page 238.

SPECIFICATIONS

See following pages.

Cable gland not supplied.

See page 184 for an overview of the Pyromodules id50 solution.


DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	ELEMENT	TERMINAL STRIP / TRANSMITTER	DISPLAY	ATEX	LENGTH L1 (mm)	TRANSMITTER SCALE
ID50						
Reference in table and diagram	1	2	3	4	5	
Possible choice	1Pt100 2Pt100 1TCK 2TCK 1TCJ 2TCJ 1TCN 2TCN	Ceramic terminal strip: B TTH200 T200 TTH300: T300 LC5335: 5335	Without: XS AS: AS A: AA	d: AD ia: IA	200 - 250 - 300 350 - 400 - 450 500 - 550 - 600 650 - 700 - 750 800 - 850 - 900 950 - 1000	

DIAGRAM

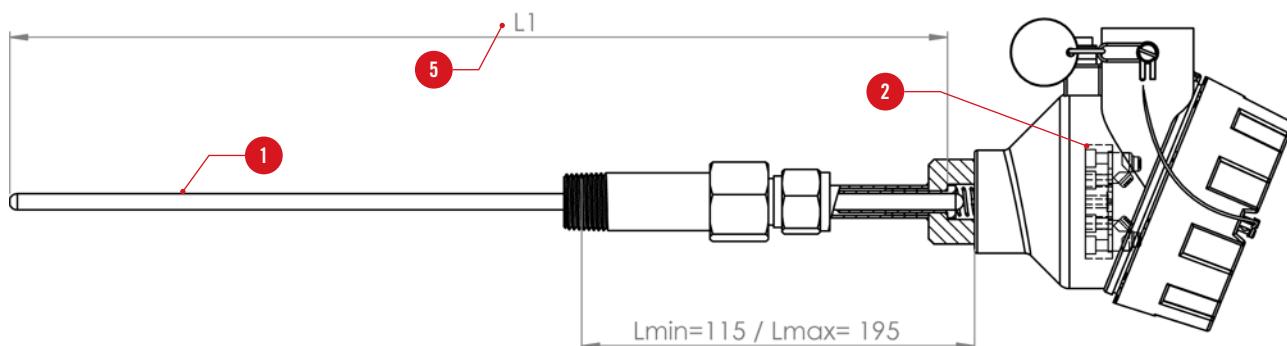

DISPLAY


ATEX PROTECTION MODES

Indicator type	Transmitter type		ATEX zone	ia protection mode	d protection mode
	TTH200	TTH300			
Type AS: without keypad	•	•	0	•	
Type A: with keypad		•	1	•	•
			2	•	•

LENGTH L1

The length L1 should be determined according to the depth of the thermowell (P1), as shown in the table below

Sensing element length	200	250	300	350	450	500	550	600	650	700	750	800	850	900	950	1000
P1 min. (mm)	20	70	120	170	266	336	386	436	488	538	588	638	688	738	788	838
P1 max. (mm)	85	135	185	235	335	385	435	487	537	587	637	687	737	787	837	887

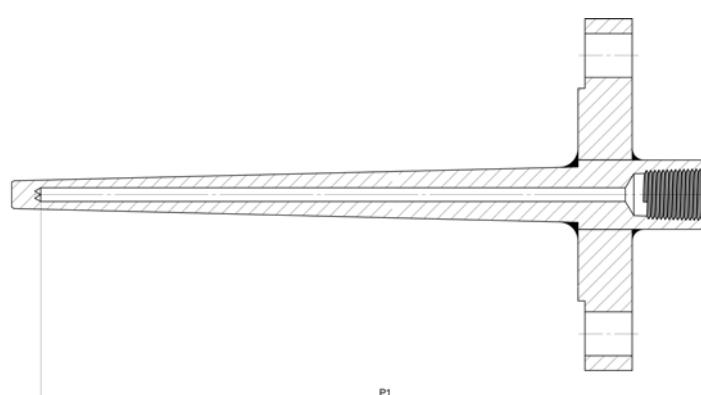

LSX-D / LSX-W HEADS

IP
54WITH OR
WITHOUT
WINDOWINTRINSIC
SAFETY

DESCRIPTION

ATEX heads for the id50 system. The PYROmodules id50 solution gives you the choice between an LSX-W head with a window and an LSX-D head without a window.

SPECIFICATIONS

Model	LSX-D	LSX-W
ATEX	II 1 GD / Ex ia IIC T6	
Material	Epoxy-coated aluminium alloy	
Colour	Yellow	
Cable input (cable gland, not supplied)	1 input M20x1.5 with plastic cover	1 input M20x1.5 with plastic cover 1 input M20x1.5 with cap
Window for mounting a display		•
External earth terminal	•	•
Cover chain	•	
Accessory supplied	Sleeved base for locking the internal element, reference L810437-004	

DESIGN YOUR SENSOR

HEAD

INDICATOR

TRANSMITTER

EXTENSIONS

SENSING ELEMENT

CODES FOR ORDERS

Photo	Head	ATEX	Pyrocontrole code
	LSX-D: without window	ia	L810439-001
	LSX-W: with window	ia	L810523-001
	LSX-W with strap for 2" tube	ia	L810499-001
	LSX-W with wall bracket	ia	L810520-001

MOUNTING



AS - A INDICATORS

WITH OR
WITHOUT
KEYPADINTRINSIC
SAFETYSELF-
POWERED

DESCRIPTION

ATEX ia indicators for the id50 system.
 LCD indicators for mounting on TTH transmitters
 Type AS: without keypad
 Type A: with keypad

SPECIFICATIONS

Model	Type AS	Type A
Reference	L810503-000	L810502-000
Properties	Graphical LCD indicator controlled by transmitter without configuration function	Graphical LCD indicator controlled by transmitter with configuration function (keypad)
Compatibility	TTH200 / TTH300	TTH300
Display	Polarity signs, 4 digits, 2 digits after decimal point	Height of characters depending on the mode, polarity signs, 4 digits, 2 digits after the decimal point, graphical bar indicator.
Display possibilities	Sensor process value Bar chart Output %	Sensor 1 process value Sensor 2 process value Ambient temp./ electronics temp. Output value Output % Bar chart Output % Troubleshooting display information for transmitter and sensor status
Ambient operating temperature		-20 to +70°C

DESIGN YOUR SENSOR

HEAD

INDICATOR

TRANSMITTER

EXTENSIONS

SENSING ELEMENT

DISPLAY

Type A LCD indicator




- 1 Quit / Cancel
- 2 Scroll back
- 3 Scroll forward
- 4 Confirm

Type AS LCD indicator



MOUNTING

The type A indicator can only be mounted on a TTH300 transmitter. The type AS indicator can be mounted on a TTH200 or TTH300 transmitter. It can be configured using the keypad on the indicator. The indicator is fixed on a tilted base. The indicator+transmitter assembly can only be mounted in LSX-W heads.

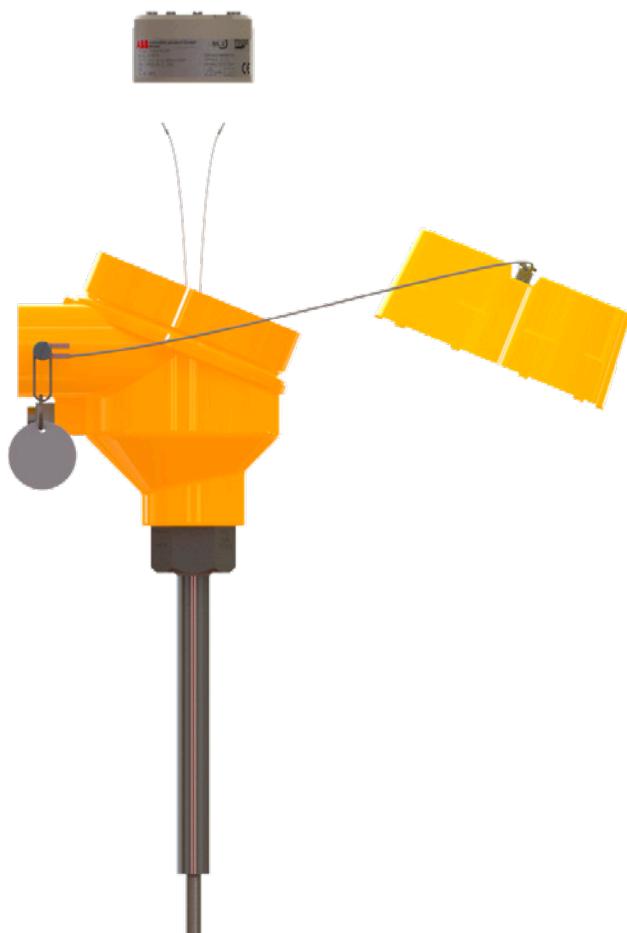

CODES FOR ORDERS

Indicator type	Transmitter type		Atex	Pyrocontrole code
	TTH200	TTH300		
Type AS: without keypad	•	•	ia	L810502-100
Type A: with keypad		•	ia	L810503-100

5335 TTH200/300 TRANSMITTERS



**INSULATED
4-20 mA
OUTPUT**

**TTH300
DUPLEX
VERSION**

**TTH200
TTH300
IP20 / IP00**

**5335
IP68 / IP00**

**UNIVERSAL
INPUT**

HART

DESCRIPTION

Programmable transmitters for conversion into a 4-20 mA analogue signal

TRANSMITTER SPECIFICATIONS

Model	TTH200	TTH300	5335
Reference	LTTH200-100	LTTH300-100	LC5335B-100
ATEX	 	 	
Compatible protection mode	Ex ia	•	•
Ambient operating temperature		-50 to +44°C for T6 / -40 to +60°C for T4	-40 to +60°C for T6 -40 to +85°C for T4
HART protocol	HART 5	HART 5 or HART 7 (choice by switch) Delivered with HART 5 as standard.	HART 5
Input		3 or 4-wire Pt100 / J, K, N or T TC	
Cold junction compensation (if used as TC input)	•	•	•
Number of sensors	1	2	1
Output		4-20mA	
Sensor breakage		Programmable 3.5...23mA	
Power supply		11...30Vdc	8.0...30Vdc
Galvanic insulation		3.5 kVdc (2.5 kVac), 60s	1.5 kVac / 50Vac
Protection rating (as per EN60529) (head/terminals)		IP20 / IP00	IP68 / IP00
Dimensions		Diam 44.4mm x h 24.7mm	Diam 44.0mm x h 20.2mm

TERMINAL STRIP SPECIFICATIONS

References	L015078-000	L015079-000	L015080-000
Number of terminals	2	4	6
Connection	1 x TC	2 x TC or 1 x 3-wire Pt100	2 x 3-wire Pt100



DESIGN YOUR SENSOR

HEAD

INDICATOR


TRANSMITTER

EXTENSIONS


SENSING ELEMENT

CONNECTION

TTH200/300 transmitter

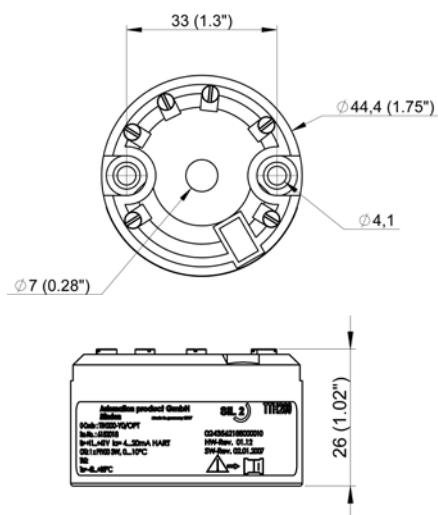

5335 transmitter

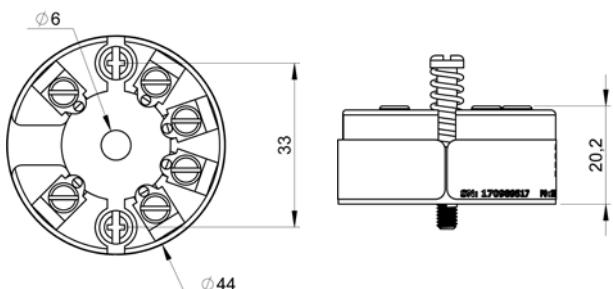


MOUNTING

Insert the wires of the ID50 measuring element inside the transmitter and screw it inside the connecting head.

For the intrinsic-safety loop calculation, the electrical parameters of the transmitters are indicated in the ia/A safety instructions.

Set up the cable of the ID50 measuring element as shown in the wiring diagrams.

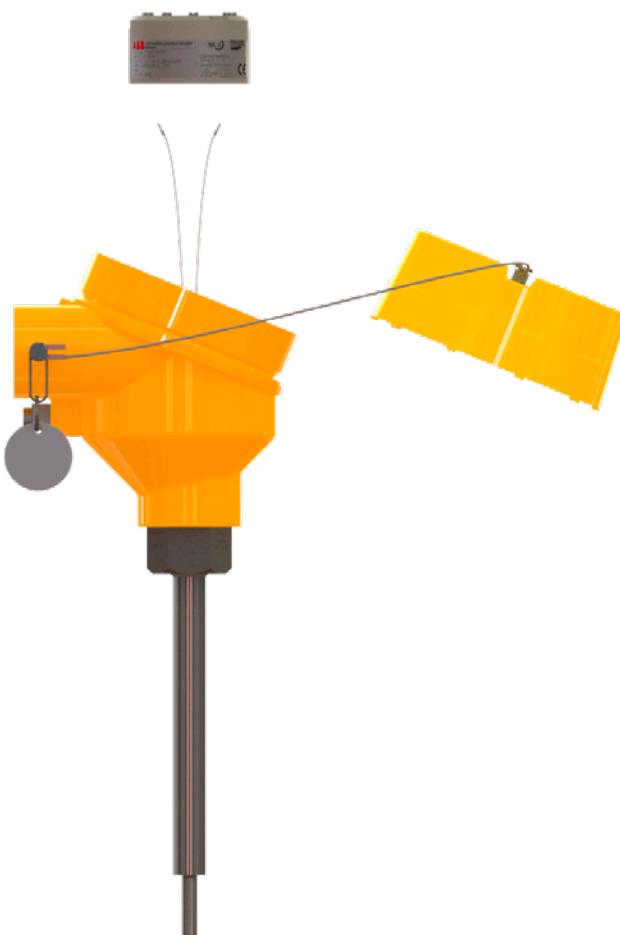


CODES FOR ORDERS

Transmitter	ATEX	Pyrocontrole code
TTH200	ia	LTTH200-100
TTH300	ia	LTTH300-100
5335B	ia	LC5335B-100

Ceramic terminal strip	ATEX	Pyrocontrole code
2 terminals	ia	L015078-000
4 terminals	ia	L015079-000
6 terminals	ia	L015080-000

ID50 SENSOR EXTENSIONS

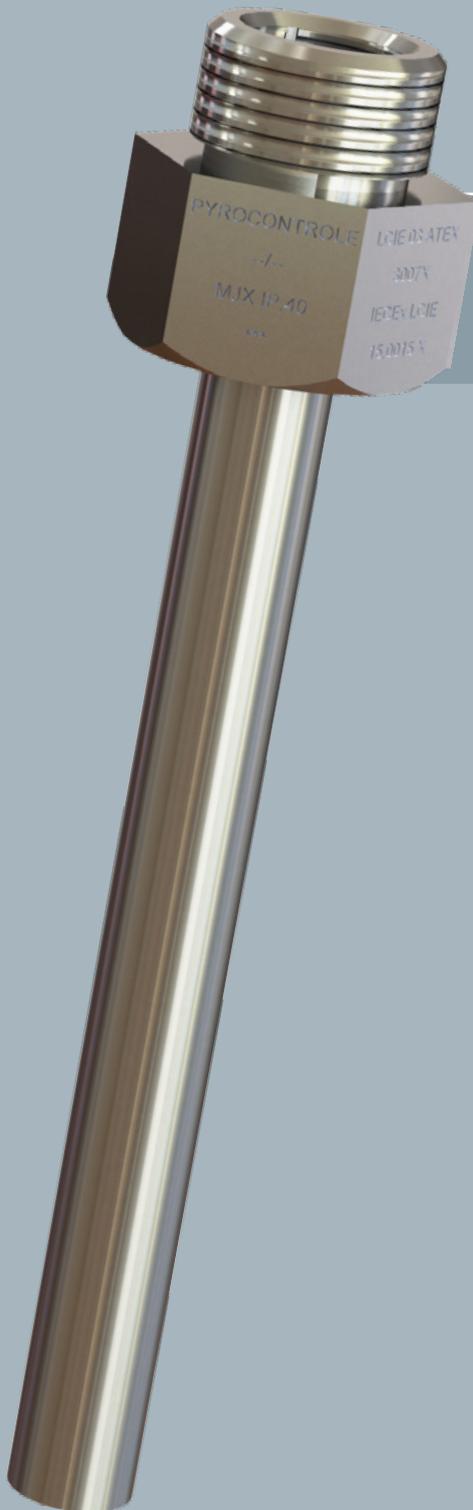

**ADJUSTABLE
FROM 120
TO 200 MM**

**STAINLESS
STEEL
316L**

DESCRIPTION

The extension provides the link between the head and the thermowell. It comprises two parts, upper and lower, and can be adjusted without cutting according to the length of the measuring element and the depth of the thermowell.

SPECIFICATIONS

Part	Upper	Lower
ATEX	Ex II 2G - Ex db IIC T6 Gb	N/A
Material	316L	
Mounting	On head	On thermowell
Threading	As per table opposite	1/2 NPT
Accessories	Screw for locking the measuring element for any head other than the LSX model. Thread lock.	

DESIGN YOUR SENSOR

HEAD


INDICATOR

TRANSMITTER


EXTENSIONS

SENSING ELEMENT

DIAGRAM

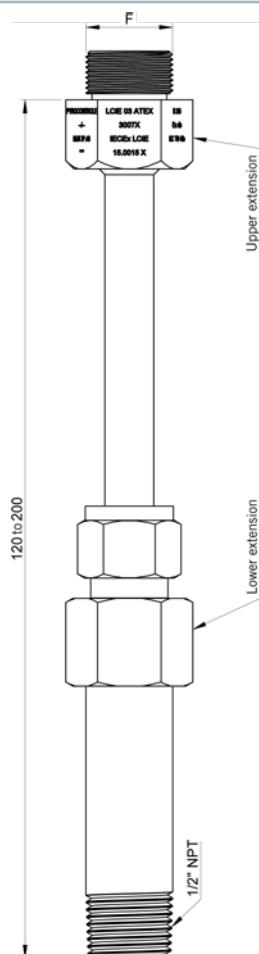

MOUNTING

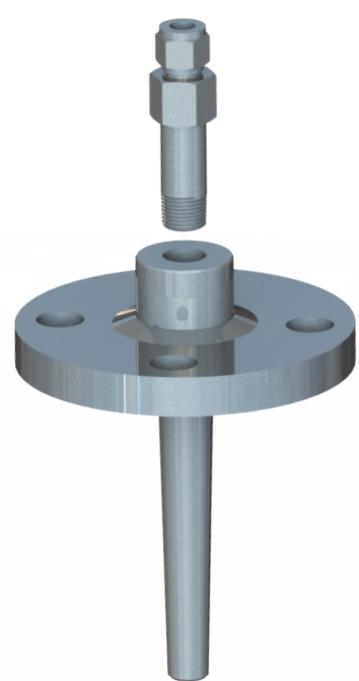

Tighten until the lower extension is locked.


CODES FOR ORDERS

	Assembly	F	Pyrocontrole code
Upper extension	For LSX head (locking screw not included)	G1/2	L810437-001
	for other heads (screw included)	G1/2	L810437-G12
		M24	L810437-M24
		M20	L810437-M20
	1/2 NPT		L810437-N12
Lower extension			L810437-000



IDG50

THERMOCOUPLE

INTRINSIC
SAFETYCLASS
1SINGLE
OR
DUPLEXIEC
584-1

DESCRIPTION

Thermocouple measuring elements for the id50 system.


SPECIFICATIONS

Model	idg50		
Compliance with standards	IEC 61515 / IEC 584-1 / EN 60079-0		
ATEX	II 2 G / Ex db IIC T6 Gb /	II 1 GD / Ex ia IIC T6 Ga /	Ex ia IIIC T85°C Da
Type	K	J	N
Material	Inconel 600	316L	Inconel 600
Class	1	1	1
Diameter (d) (mm)	6		
Hot junction	Insulated		
Thermocouple	Single / Duplex		
Lengths (mm)	200 to 1000		
Operating temperature (°C)	Min	-40	-40
	Max	1100	700
Output	Wires 150 mm long with end-pieces		
Vibration withstand	60g		

DESIGN YOUR SENSOR


HEAD INDICATOR TRANSMITTER EXTENSIONS SENSING ELEMENT

DIAGRAM

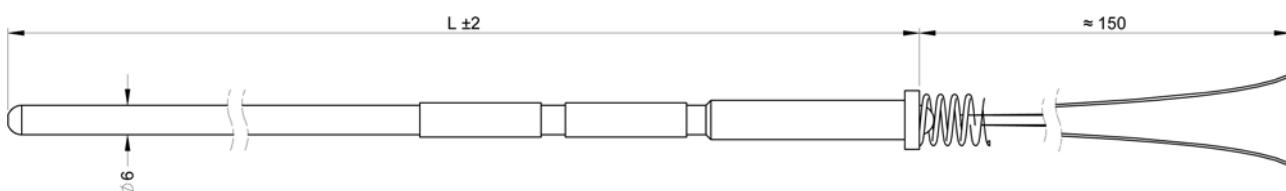

DETERMINATION OF THE LENGTH OF THE IDG50 ELEMENT

Flanged thermowell

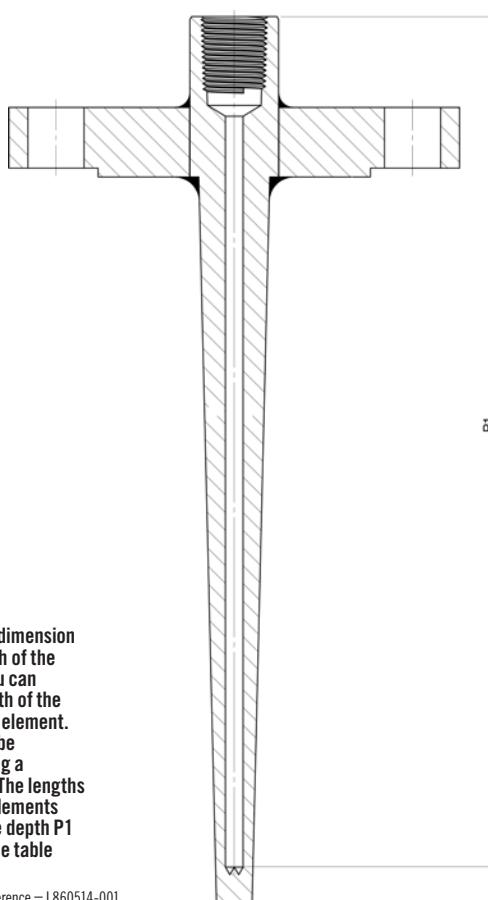

By determining dimension P1 (drilling depth of the thermowell), you can choose the length of the ID50 measuring element. This length can be determined using a measuring rod. The lengths of the sensing elements according to the depth P1 are defined in the table below.

*measuring rod = Reference = L860514-001

CODES FOR ORDERS


K THERMOCOUPLE	Single reference	Duplex reference
Length 200 mm	L810430-200	L810431-200
Length 250 mm	L810430-250	L810431-250
Length 300 mm	L810430-300	L810431-300
Length 350 mm	L810430-350	L810431-350
Length 400 mm	L810430-400	L810431-400
Length 450 mm	L810430-450	L810431-450
Length 500 mm	L810430-500	L810431-500
Length 550 mm	L810430-550	L810431-550
Length 600 mm	L810430-600	L810431-600
Length 650 mm	L810430-650	L810431-650
Length 700 mm	L810430-700	L810431-700
Length 750 mm	L810430-750	L810431-750
Length 800 mm	L810430-800	L810431-800
Length 850 mm	L810430-850	L810431-850
Length 900 mm	L810430-900	L810431-900
Length 950 mm	L810430-950	L810431-950
Length 1000 mm	L810430-001	L810431-001
N thermocouple	L810447-...	L810449-...
J thermocouple	L810445-...	L810448-...

CONNECTIONS - SINGLE AND DUPLEX

K TC



Duplex K TC




Sensing element length	200	250	300	350	450	500	550	600	650	700	750	800	850	900	950	1000
Min. P1 (mm)	20	70	120	170	266	336	386	436	488	538	588	638	688	738	788	838
Max. P1 (mm)	85	135	185	235	335	385	435	487	537	587	637	687	737	787	837	887



IDG50

Pt100

INTRINSIC
SAFETYCLASS
ASINGLE
OR
DUPLEXIEC
60751

DESCRIPTION

Pt100 measuring elements for the id50 system

SPECIFICATIONS

Model	idg50			
Compliance with standards	IEC 60751 / EN 60079-0			
ATEX	Ex II 2 G / Ex db IIC T6 Gb / Ex II 1 GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da			
Type	Pt100			
Material	316 L			
Class	A			
Diameter (d) (mm)	6			
Min./max. operating temp. (°C)	-40°C... 450°C			
Output	Wires 150 mm long with end-pieces			
Reference	L810432	L810433	L810434	L810435
Thermocouple	Single	Duplex	Single	Duplex
Mounting	1x3 wires	2x3 wires	1x3 wires	2x3 wires
Vibration withstand	10g		50g	

See page 184 for an overview of the PYROmodules id50 solution

DESIGN YOUR SENSOR

HEAD


INDICATOR

TRANSMITTER

EXTENSIONS


SENSING ELEMENT

DIAGRAM

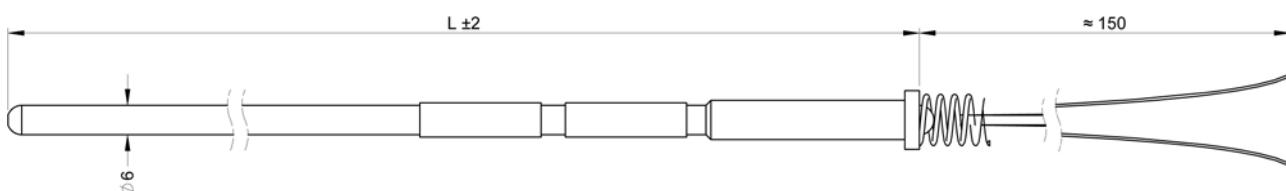

DETERMINATION OF THE LENGTH OF THE IDG50 SENSING ELEMENT

Flanged thermowell

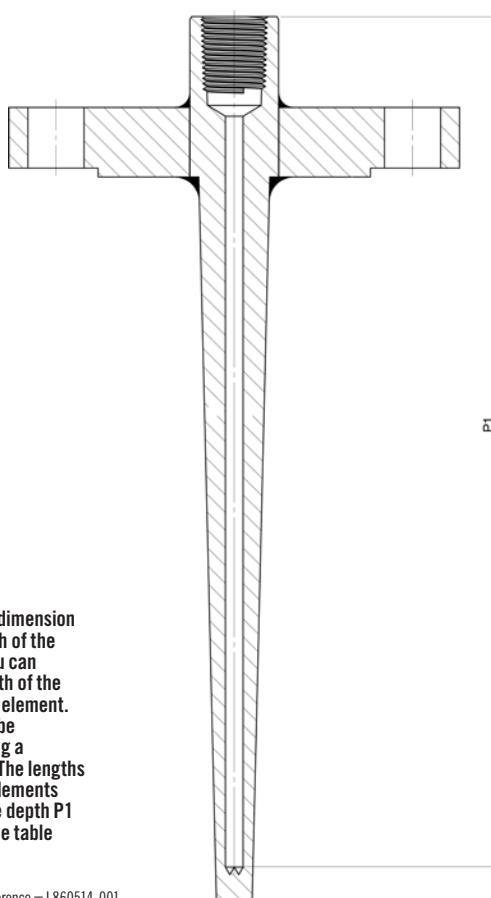


By determining dimension P1 (drilling depth of the thermowell), you can choose the length of the ID50 measuring element. This length can be determined using a measuring rod. The lengths of the sensing elements according to the depth P1 are defined in the table below.

*measuring rod = Reference = L860514-001

CODES FOR ORDERS

3-wire Pt100, Withstand 10g	Single reference	Duplex reference
Length 200 mm	L810432-200	L810433-200
Length 250 mm	L810432-250	L810433-250
Length 300 mm	L810432-300	L810433-300
Length 350 mm	L810432-350	L810433-350
Length 400 mm	L810432-400	L810433-400
Length 450 mm	L810432-450	L810433-450
Length 500 mm	L810432-500	L810433-500
Length 550 mm	L810432-550	L810433-550
Length 600 mm	L810432-600	L810433-600
Length 650 mm	L810432-650	L810433-650
Length 700 mm	L810432-700	L810433-700
Length 750 mm	L810432-750	L810433-750
Length 800 mm	L810432-800	L810433-800
Length 850 mm	L810432-850	L810433-850
Length 900 mm	L810432-900	L810433-900
Length 950 mm	L810432-950	L810433-950
Length 1000 mm	L810432-001	L810433-001
3-wire Pt100, Withstand 50g	L810434-...	L810435-...

CONNECTIONS

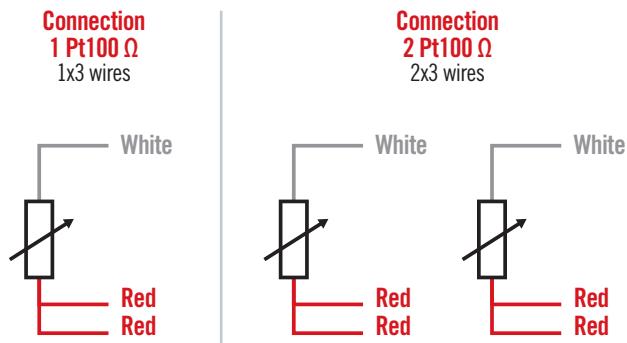


Sensing element length	200	250	300	350	450	500	550	600	650	700	750	800	850	900	950	1000
Min. P1 (mm)	20	70	120	170	266	336	386	436	488	538	588	638	688	738	788	838
Max. P1 (mm)	85	135	185	235	335	385	435	487	537	587	637	687	737	787	837	887



TA1G

THERMOCOUPLE

IP
54/65CLASS
1INTRINSIC
SAFETYIEC
584-1

DESCRIPTION

Process sensor for use in explosive zones with a gas environment, equipped with an interchangeable measuring element. For mounting in a thermowell (see page 238).

SPECIFICATIONS

Model	TA1G								
Compliance with standards	IEC 584-1 / NF EN 61515 / EN 60079-0								
Marking as per directive 2014/34/EU	With DAN i head: Ex II 1G / Ex ia IIC T4...T6 Ga With DAN Vi head: Ex II 1 GD / Ex ia IIC T4...T6 Ga Ex ia IIIC T135°C...T85°C Da								
CE type inspection certificate	LCIE 14ATEX3020 X								
Type	K	J	T	N					
Material	Inconel 600	316L	316L	Inconel 600	Pyrosil				
Class	1		2		1				
Diameter (d) (mm)	6 - 8								
Hot junction	Insulated								
Thermocouple	Single / Duplex				Single				
Length L1 max (mm)	1,500								
Max. temp. (°C) of air in sensor sheath (without airflow) (theoretical)	Diam. 6 mm	1000°C	720°C	350°C	1000°C	1100°C			
	Diam. 8 mm	1100°C	720°C	350°C	1100°C	1150°C			
Process connection	Type M extension - Type RU extension (makes it easy to orient the head). Threading: 1/2"NPT. Stainless steel.								
Electrical connection	Head type	DAN i		DAN-Vi					
	Material	Light alloy							
	Output	1 cable gland M20x1,5							
	Cable diam.	5,5 à 7,5 mm							
	Equipment	Ceramic terminal strip (standard) / Transmitter							
	IP	IP54		IP65					
Accessories	Measuring element, thermowell, cable gland								

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering


MODEL	HEAD	TC	SHEATH TYPE	Ø SHEATH (mm)	LENGTH L1 (mm)	EXTENSION	OPTION	TRANSMITTER	TRANSMITTER SCALE
TA1G									
Reference in table and diagram	1	2	3	4	5	6	7		
Possible choice	DAN i: DNI DAN-Vi: DVI	1T / 1J 1K / 1N 2K / 2J	316L: AC INCONEL 600: CM PYROSIL: DB	6 / 8	Max. 1,500 mm	Extension type M: M Extension type RU: R	LC5331B-321: F LC5335B-100: G		

THERMOCOUPLE INFORMATION

Class 1 TC		Sheath diameter (mm)		4
T (CLASS 2)	J	6	8	
316L	316L	316L	316L	
316L	316L	316L	316L	
INCONEL600	INCONEL600	INCONEL600	-	
INCONEL600	INCONEL600	-		
PYROSIL	PYROSIL	PYROSIL		
316L	316L	316L		
INCONEL600	INCONEL600	INCONEL600		

CONNECTIONS

Duplex thermocouple



Single thermocouple




TRANSMITTER INFORMATION (1 TC ONLY)

7

For any other configuration, please contact us.


Transmitter				
Input	Output	Galvanic insulation	ATEX	Reference
TC + Pt100	4-20mA	1,5kV	ia	LC5331B-321
TC + Pt100	4-20mA + HART	1,5kV	ia	LC5335B-100

DIAGRAM

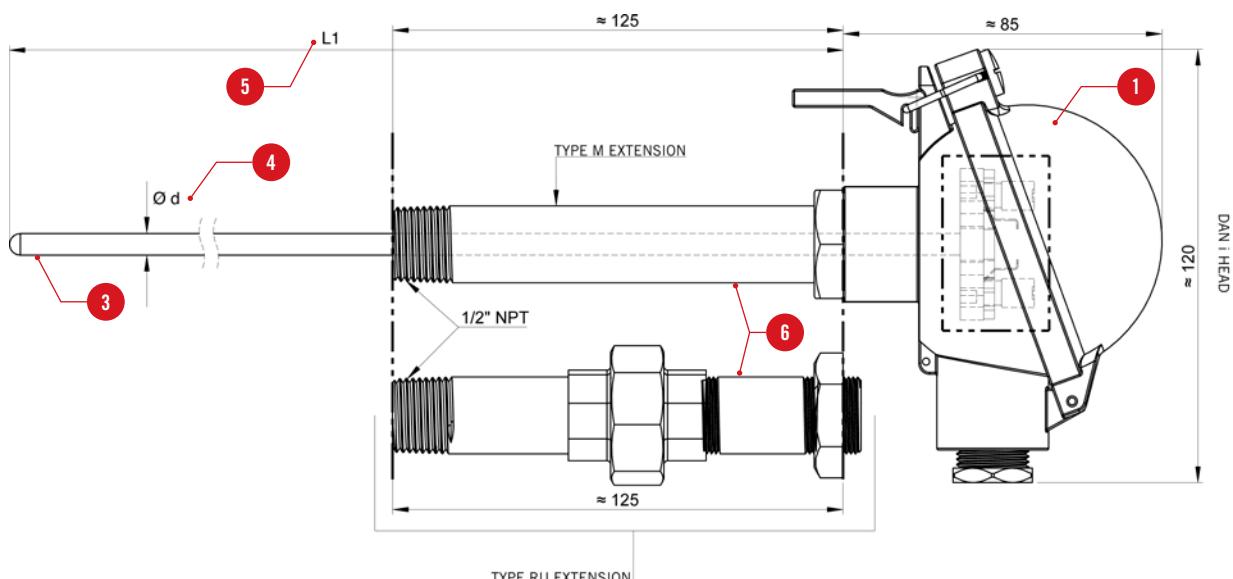

SA1G

Pt100

IP
54/65CLASS
AIEC
60751INTRINSIC
SAFETY**DESCRIPTION**

Pt100 process sensor for use in explosive zones with a gas environment, equipped with an interchangeable measuring element. For mounting in a thermowell (see page 238).

SPECIFICATIONS

Model	SA1G		
Compliance with standards	IEC 60751 / EN 60079-0		
Marking as per directive 2014/34/EU	With DAN i head: Ex II 1G / Ex ia IIC T4...T6 Ga With DAN Vi head: Ex II 1 GD / Ex ia IIC T4...T6 Ga Ex ia IIIC T135°C...T85°C Da		
CE type inspection certificate	LCIE 14ATEX3020 X / IECEx LCIE 14.0021 X		
Type	Pt100		
Class	A		
Mounting/Construction	1x3 wires / 1x4 wires / 2x2 wires / 2x3 wires		
Diameter (d) (mm)	6 / 8		
Min./max. operating temperature (°C)	-40...+450°C		
Type of measuring element	DS... / TS...		
Length L1 max (mm)	1 500		
Process connection	Type M extension - Type RU extension (makes it easy to orient the head). Threading: 1/2"NPT. Stainless steel.		
Electrical connection	Head type	DAN i	DAN-Vi
	Material	Light alloy	
	Output	1 cable gland M20x1.5	
	Cable diam.	5.5 to 7.5 mm	
	Equipment	Ceramic terminal strip (standard) / Transmitter	
	IP	IP54	IP65
Accessories	Measuring element, thermowell, cable gland		

For any other configuration, please contact us.

DESIGN YOUR SENSOR


CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	HEAD	DIAM (mm)	MOUNTING	LENGTH L1 (mm)	EXTENSION	OPTION	TRANSMITTER	TRANSMITTER SCALE
SA1G	1	2	3	4	5		6	
Reference in table and diagram	DAN i: DNI DAN-Vi: DVI	Diam d: 6 / 8	1x3 wires: B 1x4 wires: C 2x2 wires: D 2x3 wires: E	Max. 1,500 mm*	Extension type M: M Extension type RU: R		LC5333B-100: E LC5331B-321: F LC5335B-100: G	

*2x2-wire mounting limited to 250 mm


CONNECTIONS

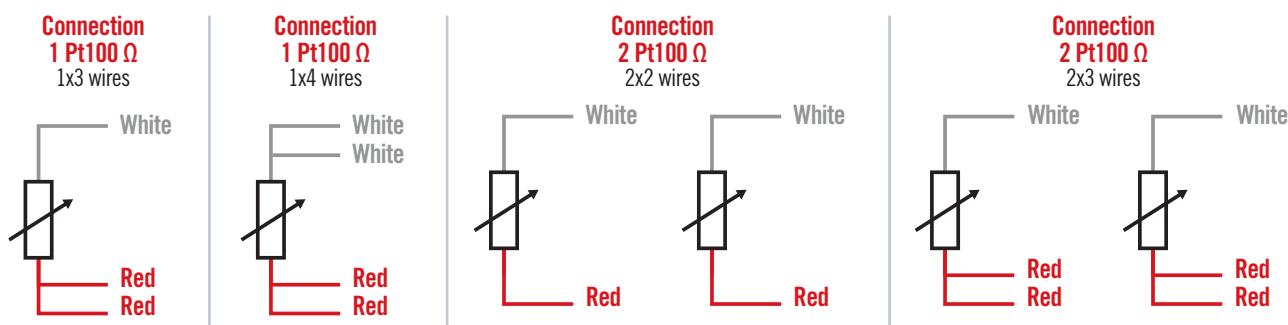

TRANSMITTER INFORMATION (1 PT100 ONLY)

Transmitter				
Input	Output	Galvanic insulation	ATEX	Reference
Pt100	4-20mA	NONE	ia	LC5333B-100
TC + Pt100	4-20mA	1.5kV	ia	LC5331B-321
TC + Pt100	4-20mA + HART	1.5kV	ia	LC5335B-100

DIAGRAM

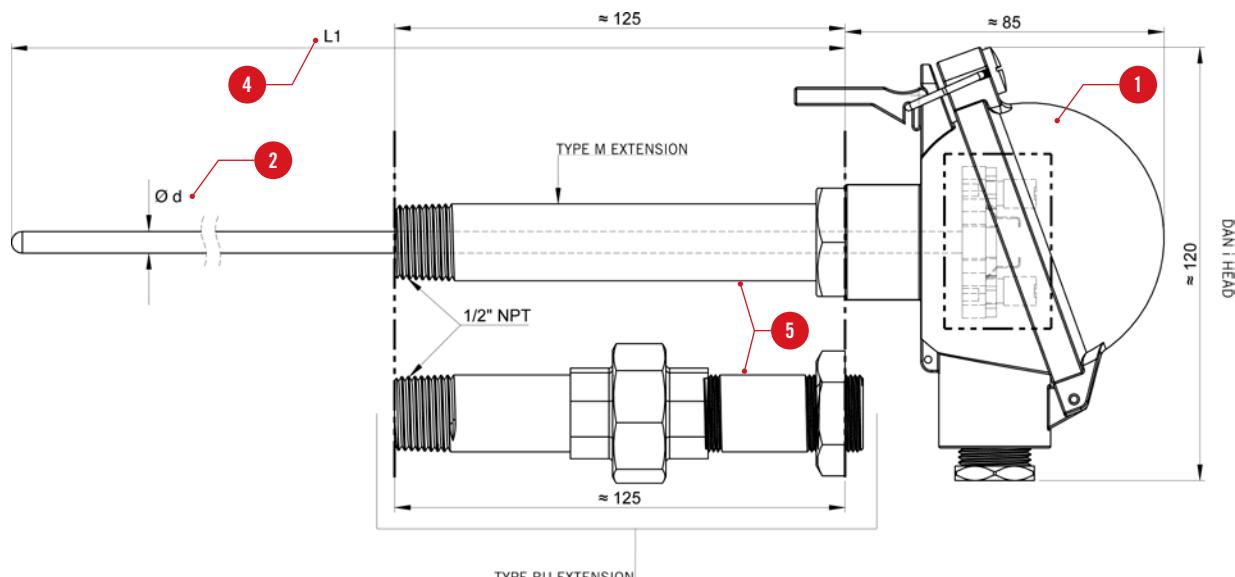



TCG3i

THERMOCOUPLE

PVC
CABLE
OUTPUT

INTRINSIC
SAFETY

CLASS
1

IEC
584-1



DESCRIPTION

Bendable flexible sheathed thermocouple for adaptation to the application, even in confined spaces. Small-diameter sensor with a short response time. Equipped with a cable for easy connection even over long distances.

Intrinsically-safe ATEX model for use in gas zones (0, 1 and 2) and dust zones (20, 21, 22).

Thermocouples up to 3 mm in diameter must be handled with caution to avoid any breakage.

SPECIFICATIONS

Model	TCG3i	
Compliance with standards	IEC 584-3 / EN 61515 / EN 60079-0	
Marking as per directive 2014/34/EU	II 1 GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da"	
CE type inspection certificate	LCIE 14ATEX3020 X	
Type	K	J
Material	Inconel 600	316L
Class	1	
Diameter (d) (mm)	1 / 1,5 / 2 / 3 / 4,5 / 6 / 8	
Hot junction	Insulated	
Thermocouple	Single / Duplex	
Length L max (mm)	Diam. 1 to 2 mm	100 to 36,000 mm
	Diam.> 2 mm	100 to 30,000 mm
Max. temp. in air (°C) in sensor sheath (without flow) (theoretical)	Diam.1 -1.5mm	650°C
	Diam. 2 mm	700°C
	Diam. 3 mm	750°C
	Diam. 4.5mm	800°C
	Diam. 6 mm	1000°C
	Diam. 8 mm	1100°C
Output	Type of cable	extension
	Cable sheath	PVC
	Max. temperature	105°C
	Conductors	2x0.22 mm ² , PVC insulation
	Braid	Internal, copper, connected to sensor sheath
Accessories	Length Lc Min/Max (mm)	200 to 10,000 mm
	Leak-tight fittings, rotating fittings	

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	TC TYPE	Ø SHEATH (MM)	LENGTH L (mm)	LENGTH LC (mm)	PROTECTIVE SPRING
TCG3i					
Reference in table and diagram	1	2	3	4	5
Possible choice	1J / 1K / 2J / 2K 4.5 / 6.0 / 8.0	1.0 / 1.5 / 2.0 / 3.0 4.5 / 6.0 / 8.0	Diam 1-1.5-2: 00100 to 36,000 Diam 3 - 4.5 - 6 - 8: 00100 to 30,000	Lc: 200 to 10,000 mm (standard: 2,000 mm)	Without: 0 With: 1 (standard)

DIAGRAM


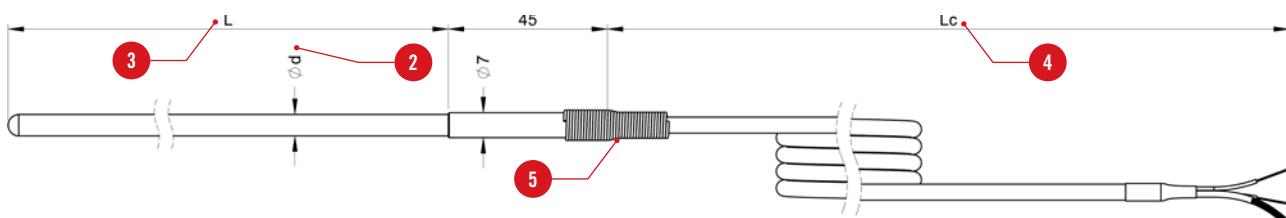


TABLE OF THERMOCOUPLE INFORMATION

Model	Cable	TC Class 1	Sheath diameter (mm)						
			1	1.5	2	3	4.5	6	8
TCG3i	PVC sheath	J	316L	316L	316L	316L	316L	316L	316L
		K	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600
		2J	-	316L	316L	316L	316L	316L	316L
		2K	-	-	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600

CONNECTIONS

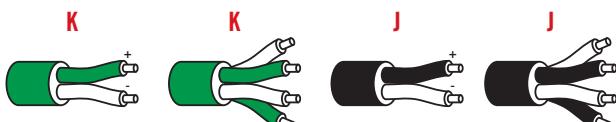

Single

Duplex

Single

Duplex

For any other configuration, please contact us.



TCG32i

THERMOCOUPLE

FEP
CABLE
OUTPUTCLASS
1INTRINSIC
SAFETYIEC
584-1

DESCRIPTION

Bendable flexible sheathed thermocouple for adaptation to the application, even in confined spaces. Small-diameter sensor with a short response time. Equipped with a cable for easy connection even over long distances.

Intrinsically-safe ATEX model for use in gas zones (0, 1 and 2) and dust zones (20, 21, 22).

Thermocouples up to 3 mm in diameter must be handled with caution to avoid any breakage.

SPECIFICATIONS

Model	TCG32i	
Compliance with standards	IEC 584-1 / EN 61515 / EN 60079-0	
Marking as per directive 2014/34/EU	II 1 GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da	
CE type inspection certificate	LCIE 14ATEX3020 X	
Type	K	J
Material	Inconel 600	316L
Class	1	
Diameter (d) (mm)	1 / 1.5 / 2 / 3 / 4.5 / 6 / 8	
Hot junction	Insulated	
Thermocouple	Single / Duplex	
Length L max (mm)	Diam. 1 to 2 mm	100 to 36,000 mm
	Diam.> 2 mm	100 to 30,000 mm
Max. temp. in air (°C) in sensor sheath (without flow) (theoretical)	Diam.1 -1.5mm	650°C
	Diam. 2 mm	700°C
	Diam. 3 mm	750°C
	Diam. 4.5mm	800°C
	Diam. 6 mm	1000°C
	Diam. 8 mm	1100°C
Output	Type of cable	extension
	Cable sheath	FEP
	Max. temperature	250°C
	Conductors	2 x 0.22 mm ² , FEP insulation
	Braid	Internal, copper, connected to sensor sheath
Accessories	Length Lc Min/Max (mm)	200 to 10,000 mm
	Leak-tight fittings, rotating fittings	

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	TC TYPE	\varnothing SHEATH (mm)	LENGTH L (mm)	LENGTH LC (mm)	PROTECTIVE SPRING
TCG32i					
Reference in table and diagram	1	2	3	4	5
Possible choice	1J / 1K / 2J / 2K	1.0 / 1.5 / 2.0 / 3.0 4.5 / 6.0 / 8.0	Diam 1-1.5-2: 100 to 36,000 Diam 3 - 4.5 - 6 - 8: 100 to 30,000	Lc: 200 to 10,000 mm (standard: 2,000 mm)	Without: 0 With: 1 (standard)

DIAGRAM


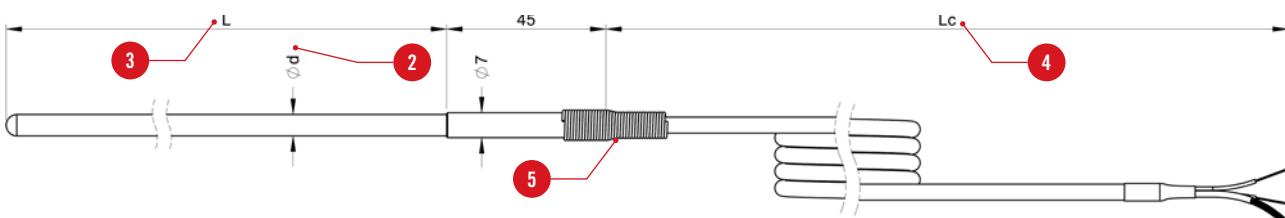


TABLE OF THERMOCOUPLE INFORMATION

Model	Cable	Class 1 TC	Sheath diameter (mm)						
			1	1.5	2	3	4.5	6	8
TCG32i	FEP sheath	J	316L	316L	316L	316L	316L	316L	316L
		K	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600
		2J	-	316L	316L	316L	316L	316L	316L
		2K	-	-	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600

CONNECTIONS

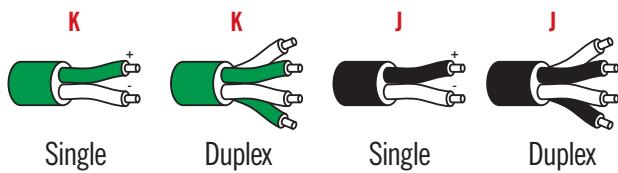

For any other configuration, please contact us.



S1i

Pt100

PVC CABLE
OUTPUT
OU FEP OU
SILICONE

**CLASS
A**

INTRINSIC
SAFETY

**IEC
60751**



DESCRIPTION

Sheathed Pt100 sensor, Class A as per IEC 60751, with cable output, for temperature measurement up to 450°C in low-pressure and low flow-rate environments.
Intrinsically-safe ATEX model for use in gas zones (0, 1 and 2) and dust zones (20, 21, 22).

SPECIFICATIONS

Model	S1i		
Compliance with standards	IEC 60751 / EN 60079-0		
Marking as per directive 2014/34/EU	II 1GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da		
CE type inspection certificate	LCIE 14ATEX3020 X		
Type	Pt100 Ω		
Material	316 L		
Class	A		
Mounting/Construction	Single: 1x3 wires ou 1x4 wires / Duplex: 2x2 wires ou 2x3 wires		
Diameter (d) (mm)	1.6 / 3 / 4.5 / 6 / 8		
Length L max (mm)	See table opposite		
Max. temp. in air (°C)	450°C		
Output	Sheath	PVC	FEP
	Max. temperature	105°C	200°C
	Conductors	3, 4 or 6 x 0.22 mm, PVC insulation	3, 4 or 6 x 0.22 mm, FEP insulation
	Shielding braid	•	•
	Length Lc Min/ Max (mm)	200 to 10,000 mm	
	Termination	Insulated bare wires	
Accessories	Measuring element, thermowell, cable gland		

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	NO. OF PT100	MOUNTING	Ø SHEATH (mm)	LENGTH L (mm)	CABLE	LENGTH LC (mm)	PROTECTIVE SPRING
S1i	1	2	3	4	5	6	7
Reference in table and diagram	1	2	3	4	5	6	7
Possible choice	1 - 2 1x3 wires: B 1x4 wires: C 2x2 wires: D 2x3 wires: E	1.6 / 3 / 4.5 / 6 / 8	As per table below	PVC PVC FEP: FEP Silicone: SIL	200 to 10,000 mm	Without: 0 With: 1 (standard)	

DIAGRAM


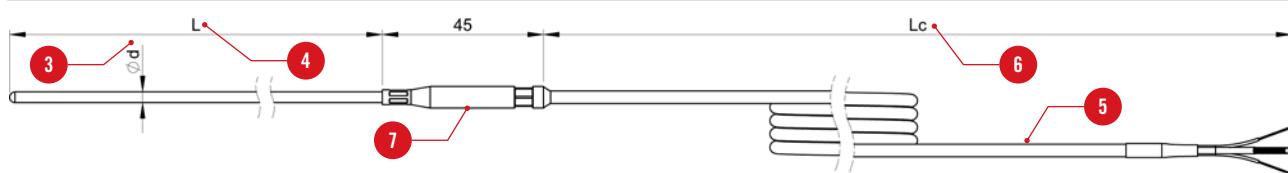


TABLE OF POSSIBLE ASSOCIATIONS

1 Number of Pt100	2 Mounting	Min. / max. length					3
		1.6	3	4.5	6	8	
1	1x3 wires	50 / 250	50 / 1500	50 / 1500	50 / 1500	50 / 1500	3
	1x4 wires	50 / 250	50 / 1500	50 / 1500	50 / 1500	50 / 1500	4
2	2x2 wires	-	-	50 / 250	50 / 250	50 / 250	
	2x3 wires	-	-	50 / 1500	50 / 1500	50 / 1500	

CONNECTIONS

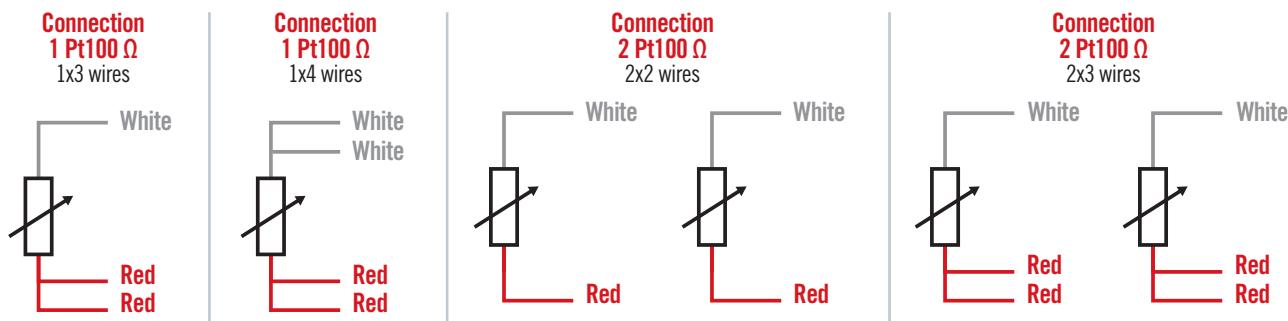

For any other configuration, please contact us.

LSX-D / LSX-W HEADS

IP
54WITH OR
WITHOUT
WINDOW

ANTI-EXPLOSION



DESCRIPTION

ATEX heads for the id50 system. The PYROmodules id50 solution allows you to choose between an LSX-W head with a window and a head without a window: the LSX-D

SPECIFICATIONS

Model	LSX-D	LSX-W
ATEX	Ex II 2 GD / Ex db IIC T6 Gb	
Material	Epoxy-coated aluminium alloy	
Colour	Yellow	
Cable input (cable gland, not supplied)	1 input M20x1.5 with plastic cover	1 input M20x1.5 with plastic cover 1 input M20x1.5 with cap
Process connection	G 1/2	
Window for mounting a display		•
External earth terminal	•	•
Cover chain	•	
Accessory supplied	Sleeved base for locking the internal element, reference L810437-004	

See page 184 for an overview of the PYROmodules id50 solution and page 186 to order a complete assembled sensor.

DESIGN YOUR SENSOR

HEAD

INDICATOR

TRANSMITTER

EXTENSIONS

SENSING ELEMENT

CODES FOR ORDERS

Picture	Head	ATEX	Pyrocontrole code
	LSX-D: without window	d	L810439-001
	LSX-W: with window	d	L810523-001
	LSX-W with strap for 2" tube	d	L810499-001
	LSX-W with wall bracket	d	L810520-001

MOUNTING





AS - A INDICATORS

WITH OR
WITHOUT
KEYPAD

SELF-
POWERED

DESCRIPTION

LCD indicators for mounting on TTH transmitters

Type AS: without keypad

Type A: with keypad

SPECIFICATIONS

Model	Type AS	Type A
Reference	L810503-000	L810502-000
Properties	Graphical LCD indicator controlled by transmitter without configuration function	Graphical LCD indicator controlled by transmitter with configuration function (keypad)
Compatibility	TTH200 / TTH300	TTH300
Display	Polarity signs, 4 digits, 2 digits after the decimal point	Height of characters depending on mode, polarity signs, 4 digits, 2 digits after the decimal point, bar graph indicator.
Display possibilities	Sensor process value Bar chart Output %	Sensor process value 1 Sensor process value 2 Ambient / electronics temp. Output value Output % Bar chart Output % Troubleshooting display information for transmitter and sensor status
Ambient operating temperature		-20 to +70°C

See page 184 for an overview of the PYROmodules id50 solution and page 186 to order a complete assembled sensor.

DESIGN YOUR SENSOR

HEAD

INDICATOR

TRANSMITTER

EXTENSIONS

SENSING ELEMENT

DISPLAY

Type A LCD indicator



- 1 Quit / Cancel
- 2 Scroll back
- 3 Scroll forward
- 4 Confirm

Type AS LCD indicator



MOUNTING

The type A indicator can only be mounted on a TTH300 transmitter. The type AS indicator can be mounted on a TTH200 or TTH300 transmitter. It can be configured using the keypad on the indicator. The indicator is fixed on a tilted base. The indicator+transmitter assembly can only be mounted in LSX-W heads.



CODES FOR ORDERS

Indicator for TTHX00	Pyrocontrole code
Type AS: without keypad	L810502-100
Type A: with keypad	L810503-100

5335 TTH200/300 TRANSMITTERS

INSULATED
4-20 MA
OUTPUTTTH300
DUPLEX
VERSIONTTH200
TTH300
IP20 / IP005335
IP68 / IP00UNIVERSAL
INPUT

HART

DESCRIPTION

Programmable transmitters for conversion into a 4-20 mA analogue signal

TRANSMITTER SPECIFICATIONS

Model	TTH200	TTH300	5335
Reference	LTTH200-100	LTTH300-000	LC5335A-100
SIL2 as per IEC 61508	•	•	•
Compatible protection mode	Ex d	•	•
Ambient operating temperature	-40 to +85°C / -20 to +70°C with display	-40 to +85°C	-40 to +85°C
HART protocol	HART 5	HART 5 or HART 7 (choice by switch) Delivered with HART 5 as standard.	HART 5
Input	Pt100 3 or 4 wires / TC J, K, N, T		
Cold junction compensation (if used as TC input)	•	•	•
Number of sensors	1	2	1
Output	4-20mA		
Sensor breakage	Programmable 3.5...23mA		
Power supply	11...42 Vdc		8.0...35Vdc
Galvanic insulation	3.5 kVdc (2.5 kVac), 60s		1.5 kVac / 50Vac
Protection rating (as per EN60529) (head/terminals)	IP20 / IP00		IP68 / IP00
Dimensions	Diam 44.4mm x h 24.7mm		Diam 44.0mm x h 20.2mm

**TERMINAL STRIP SPECIFICATIONS**

References	L015078-000	L015079-000	L015080-000
Number of terminals	2	4	6
Connection	1 x TC	2 x TC or 1 x 3-wire Pt100	2 x 3-wire Pt100

DESIGN YOUR SENSOR

HEAD

INDICATOR


TRANSMITTER

EXTENSIONS


SENSING ELEMENT

CONNECTION

TTH200/300 transmitter

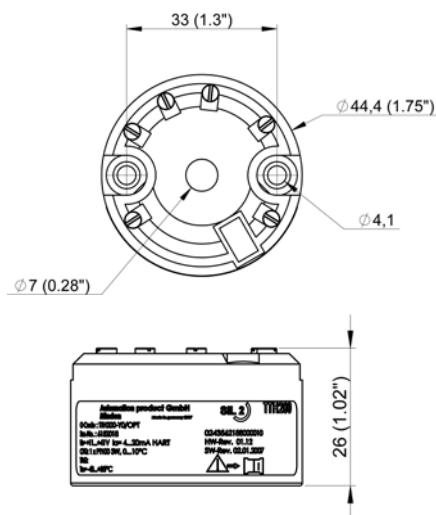


5335 transmitter

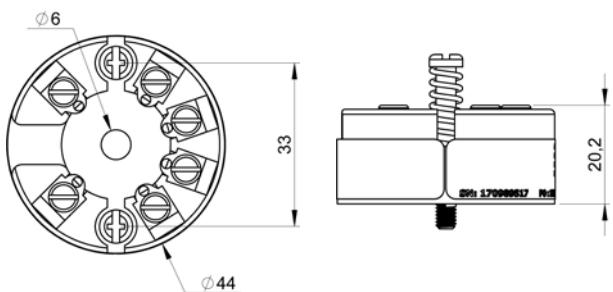

MOUNTING

Insert the wires of the ID50 measuring element inside the transmitter and screw it inside the connecting head.
For the intrinsic-safety loop calculation, the electrical parameters of the transmitters are indicated in the ia/A safety instructions.
Set up the cable of the ID50 measuring element as shown in the wiring diagrams.

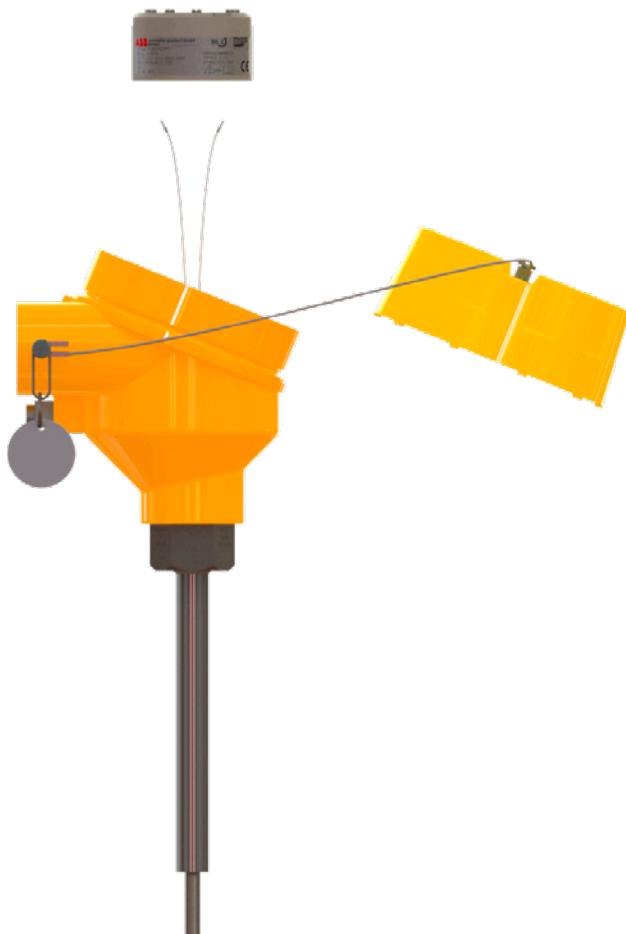

CODES FOR ORDERS

Transmitter	Pyrocontrole code
TTH200	LTTTH200-000
TTH300	LTTTH300-000
5335B	LC5335A-100

Ceramic terminal strip	Pyrocontrole code
2 terminals	L015078-000
4 terminals	L015079-000
6 terminals	L015080-000

See page 184 for an overview of the PYROmodules id50 solution and page 186 to order a complete assembled sensor.

ID50 SENSOR EXTENSIONS



**ADJUSTABLE
FROM 120 TO
200 MA**

**316L
STAINLESS
STEEL**

DESCRIPTION

The extension provides the link between the head and the thermowell. It comprises two parts, upper and lower, and can be adjusted without cutting , according to the length of the measuring element and the depth of the thermowell.

SPECIFICATIONS

Part	Upper	Lower
ATEX	Ex II 2G - Ex db IIC T6 Gb	N/A
Material	316L	
Mounting	On head	On thermowell
Threading	As per table opposite	1/2 NPT
Accessories	Screw for locking the measuring element for any head other than the LSX model. Thread lock	

See page 184 for an overview of the PYROmodules id50 solution and page 186 to order a complete assembled sensor.

DESIGN YOUR SENSOR

HEAD


INDICATOR

TRANSMITTER


EXTENSIONS

SENSING ELEMENT

DIAGRAM

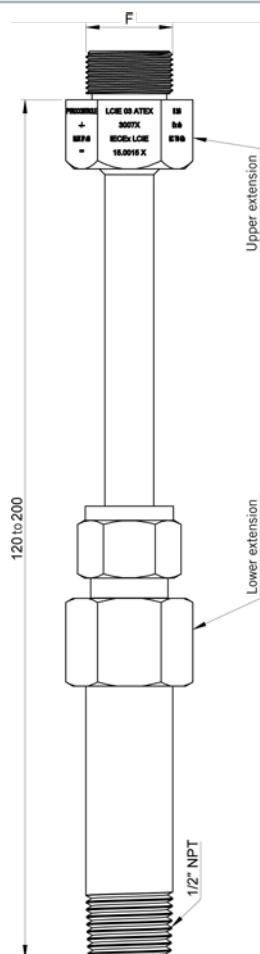

MOUNTING

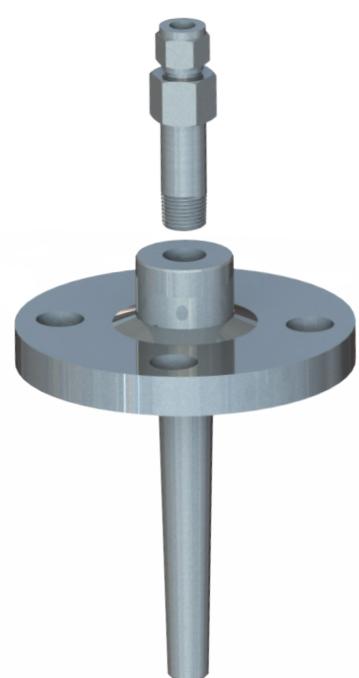

Set the lower extension in place on the thermowell.



Screw the lower extension on the thermowell with a size-27 open-end wrench by making use of the hexagonal shape of the leak-tight fitting.
Tighten until the lower extension is locked.

CODES FOR ORDERS

	Assembly	F	Pyrocontrole code
Upper extension	For LSX head (locking screw not included)	G1/2	L810437-001
	for other heads (screw included)	G1/2	L810437-G12
		M24	L810437-M24
		M20	L810437-M20
		1/2 NPT	L810437-N12
Lower extension			L810437-000



IDG50

THERMOCOUPLE

ANTI-EXPLOSION

CLASS
1SINGLE
OR
DUPLEXIEC
584-1

DESCRIPTION

Thermocouple measuring elements for the id50 system

SPECIFICATIONS


Model	IDG50			
Compliance with standards	IEC 60751 / IEC 584-1 / EN 60079-0			
ATEX	Ex II 2 G / Ex db IIC T6 Gb / Ex II 1 GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da			
Type	Pt100			
Material	316 L			
Class	W0.15			
Diameter (d) (mm)	6			
Min./max. operating temp. (°C)	-40°C... 450°C			
Output	Wires 150 mm long with end-pieces			
Reference	L810432	L810433	L810434	L810435
Thermocouple	Single	Duplex	Single	Duplex
Mounting	1x3 wires	2x3 wires	1x3 wires	2x3 wires
Vibration withstand	10g		50g	

See page 184 for an overview of the PYROmodules id50 solution and page 186 to order a complete assembled sensor.

DESIGN YOUR SENSOR


HEAD INDICATOR TRANSMITTER EXTENSIONS SENSING ELEMENT

DIAGRAM

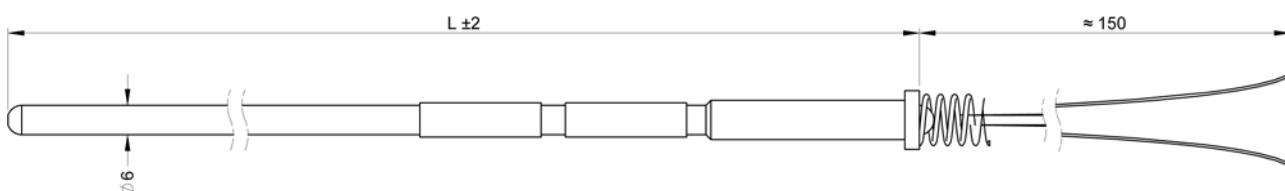

DETERMINATION OF IDG50 ELEMENT LENGTH

Flanged thermowell

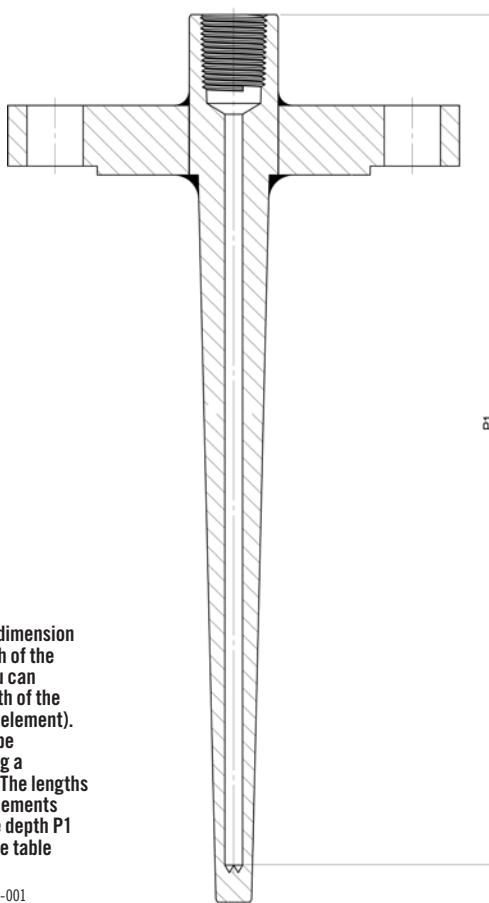

By determining dimension P1 (drilling depth of the thermowell), you can choose the length of the ID50 measuring element. This length can be determined using a measuring rod*. The lengths of the sensing elements according to the depth P1 are defined in the table below.

*Reference = L860514-001

CODES FOR ORDERS

K THERMOCOUPLE	Single reference	Duplex reference
Length 200 mm	L810430-200	L810431-200
Length 250 mm	L810430-250	L810431-250
Length 300 mm	L810430-300	L810431-300
Length 350 mm	L810430-350	L810431-350
Length 400 mm	L810430-400	L810431-400
Length 450 mm	L810430-450	L810431-450
Length 500 mm	L810430-500	L810431-500
Length 550 mm	L810430-550	L810431-550
Length 600 mm	L810430-600	L810431-600
Length 650 mm	L810430-650	L810431-650
Length 700 mm	L810430-700	L810431-700
Length 750 mm	L810430-750	L810431-750
Length 800 mm	L810430-800	L810431-800
Length 850 mm	L810430-850	L810431-850
Length 900 mm	L810430-900	L810431-900
Length 950 mm	L810430-950	L810431-950
Length 1000 mm	L810430-001	L810431-001
N thermocouple	L810447-...	L810449-...
J thermocouple	L810445-...	L810448-...

CONNECTIONS - SINGLE AND DUPLEX

KTC



KTC duplex




Sensing element length	200	250	300	350	450	500	550	600	650	700	750	800	850	900	950	1000
Min. P1 (mm)	20	70	120	170	266	336	386	436	488	538	588	638	688	738	788	838
Max. P1 (mm)	85	135	185	235	335	385	435	487	537	587	637	687	737	787	837	887



IDG50

Pt100

ANTI-EXPLOSION

CLASS
ASINGLE
OR
DUPLEXIEC
60751

DESCRIPTION

Pt100 measuring elements for the id50 system

SPECIFICATIONS


Model	IDG50			
Compliance with standards	IEC 60751 / IEC 584-1 / EN 60079-0			
ATEX	Ex II 2 G / Ex db IIC T6 Gb / Ex II 1 GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da			
Type	Pt100			
Material	316 L			
Class	A			
Diameter (d) (mm)	6			
Min./max. operating temp. (°C)	-40°C... 450°C			
Output	Wires 150 mm long with end-pieces			
Reference	L810432	L810433	L810434	L810435
Thermocouple	Single	Duplex	Single	Duplex
Mounting	1x3 wires	2x3 wires	1x3 wires	2x3 wires
Vibration withstand	10g		50g	

See page 184 for an overview of the PYROmodules id50 solution and page 186 to order a complete assembled sensor.

DESIGN YOUR SENSOR


HEAD INDICATOR TRANSMITTER EXTENSIONS SENSING ELEMENT

DIAGRAM

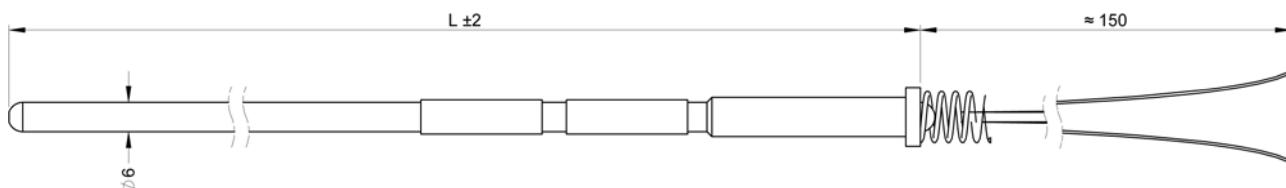

DETERMINATION OF IDG50 ELEMENT LENGTH

Flanged thermowell

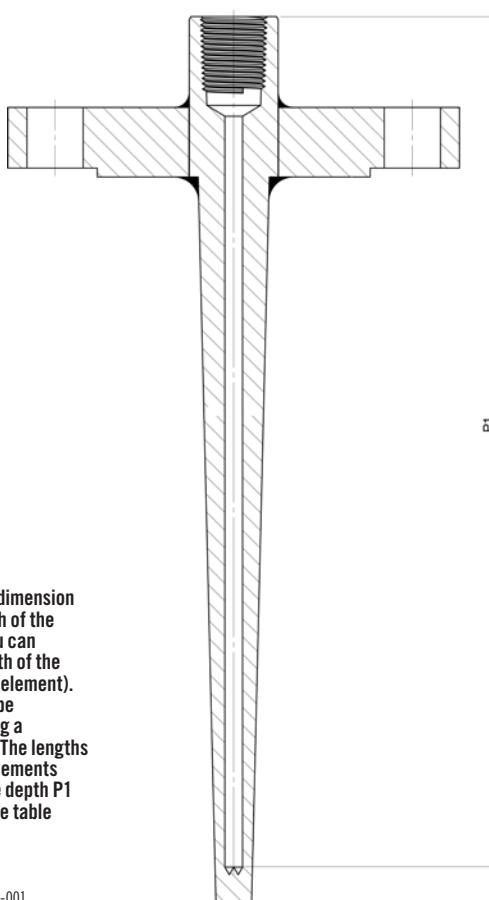


By determining dimension P1 (drilling depth of the thermowell), you can choose the length of the IDG50 measuring element. This length can be determined using a measuring rod*. The lengths of the sensing elements according to the depth P1 are defined in the table below.

*Reference = L860514-001

CODES FOR ORDERS

3-wire Pt100, Withstand 10g	Single reference	Duplex reference
Length 200 mm	L810432-200	L810433-200
Length 250 mm	L810432-250	L810433-250
Length 300 mm	L810432-300	L810433-300
Length 350 mm	L810432-350	L810433-350
Length 400 mm	L810432-400	L810433-400
Length 450 mm	L810432-450	L810433-450
Length 500 mm	L810432-500	L810433-500
Length 550 mm	L810432-550	L810433-550
Length 600 mm	L810432-600	L810433-600
Length 650 mm	L810432-650	L810433-650
Length 700 mm	L810432-700	L810433-700
Length 750 mm	L810432-750	L810433-750
Length 800 mm	L810432-800	L810433-800
Length 850 mm	L810432-850	L810433-850
Length 900 mm	L810432-900	L810433-900
Length 950 mm	L810432-950	L810433-950
Length 1000 mm	L810432-001	L810433-001
N thermocouple	L810447-...	L810449-...
J thermocouple	L810445-...	L810448-...


CONNECTIONS

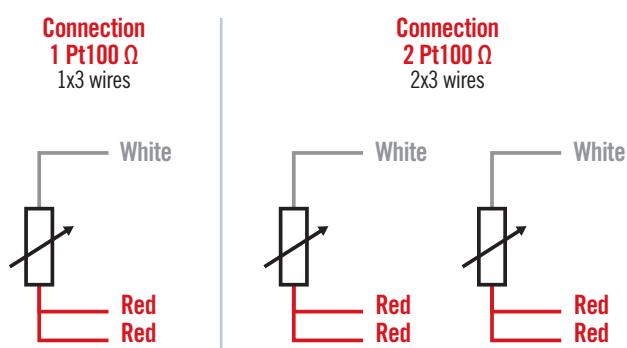

Sensing element length	200	250	300	350	450	500	550	600	650	700	750	800	850	900	950	1000
Min. P1 (mm)	20	70	120	170	266	336	386	436	488	538	588	638	688	738	788	838
Max. P1 (mm)	85	135	185	235	335	385	435	487	537	587	637	687	737	787	837	887

DUST ENVIRONMENT

ZONES 20, 21, 22

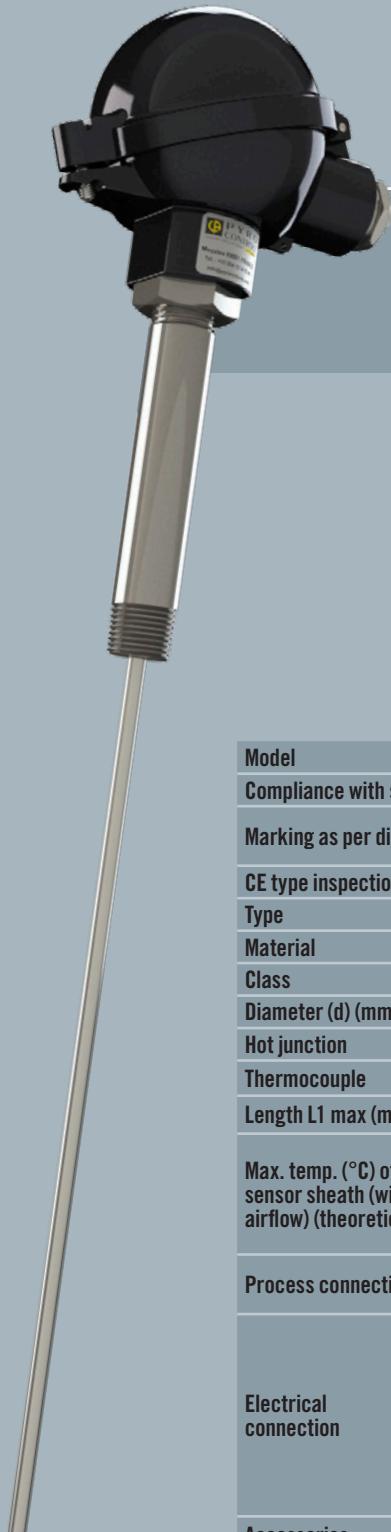

TA1D

THERMOCOUPLE

IP
65CLASS
1IEC
584-1INTRINSIC
SAFETY

DESCRIPTION

Process sensor for use in explosive zones with a dust environment, equipped with an interchangeable measuring element. For mounting in a thermowell (see page 238).

SPECIFICATIONS

Model	TA1D					
Compliance with standards	IEC 584-1 / EN 61515 / EN 60079-0					
Marking as per directive 2014/34/EU	II 1GD / Ex ia IIC T4...T6 Ga Ex ia IIIC T135°C...T85°C Da					
CE type inspection certificate	LCIE 14ATEX3020 X / IECEX LCIE 14.0021 X					
Type	K	J	T	N		
Material	Inconel 600	316L	316L	Inconel 600	Pyrosil	
Class	1		2		1	
Diameter (d) (mm)	6 - 8					
Hot junction	Insulated					
Thermocouple	Single / Duplex				Single	
Length L1 max (mm)	1,500					
Max. temp. (°C) of air in sensor sheath (without airflow) (theoretical)	Diam. 6 mm	1000°C	720°C	350°C	1000°C	1100°C
	Diam. 8 mm	1100°C	720°C	350°C	1100°C	1150°C
Process connection	Type M extension - Type RU extension (makes it easy to orient the head). Threading: 1/2" NPT. Stainless steel.					
Electrical connection	Head type	DAN-Vi				
	Material	Light alloy				
	Output	1 cable gland M20 x 1.5				
	Cable diam.	5.5 to 7.5 mm				
	Equipment	Ceramic terminal strip (standard) / Transmitter				
	IP	IP65				
Accessories	Thermowell, cable gland					

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering


MODEL	HEAD	TC TYPE	SHEATH TYPE	Ø SHEATH (mm)	LENGTH L1 (mm)	EXTENSION	OPTION	TRANSMITTER	TRANSMITTER SCALE
TA1D									
Reference in table and diagram	1	2	3	4	5	6	7		
Possible choice	DAN-Vi: DVI 1T / 1J 1K / 1N 2K / 2J	1T / 1J 1K / 1N 2K / 2J	316L: AC INCONEL 600: CM PYROSIL: DB	6 / 8	Max. 1,500 mm	Extension type M: M Extension type RU: R	LC5331B-321: F LC5335B-100: G		

THERMOCOUPLE INFORMATION

Class 1 TC		Sheath diameter (mm)		4
2	6	8		
T (CLASS 2)	316L	316L		
J	316L	316L		
K	INCONEL600	INCONEL600		
N	INCONEL600	-		
2J	PYROSIL	PYROSIL		
2K	316L	316L		
	INCONEL600	INCONEL600		
	3	4		

CONNECTIONS

Duplex thermocouple



Single thermocouple




TRANSMITTER INFORMATION (1 TC ONLY)


7

For any other configuration, please contact us.

Transmitter				
Input	Output	Galvanic insulation	ATEX	Reference
TC + Pt100	4-20mA	1.5kV	ia	LC5331B-321
TC + Pt100	4-20mA + HART	1.5kV	ia	LC5335B-100

SCHÉMA

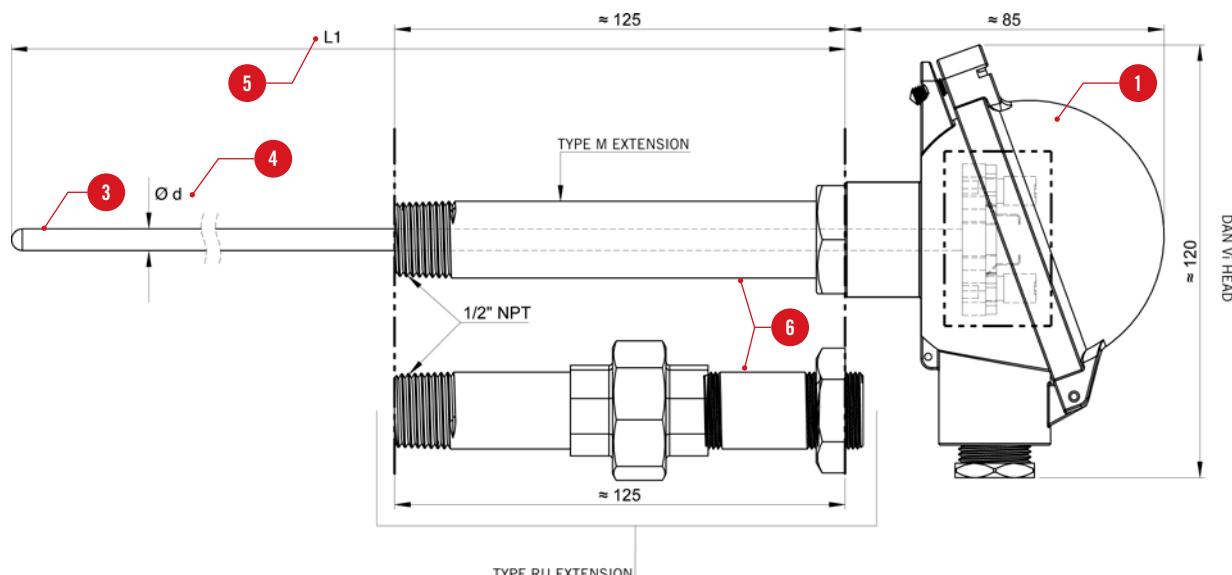

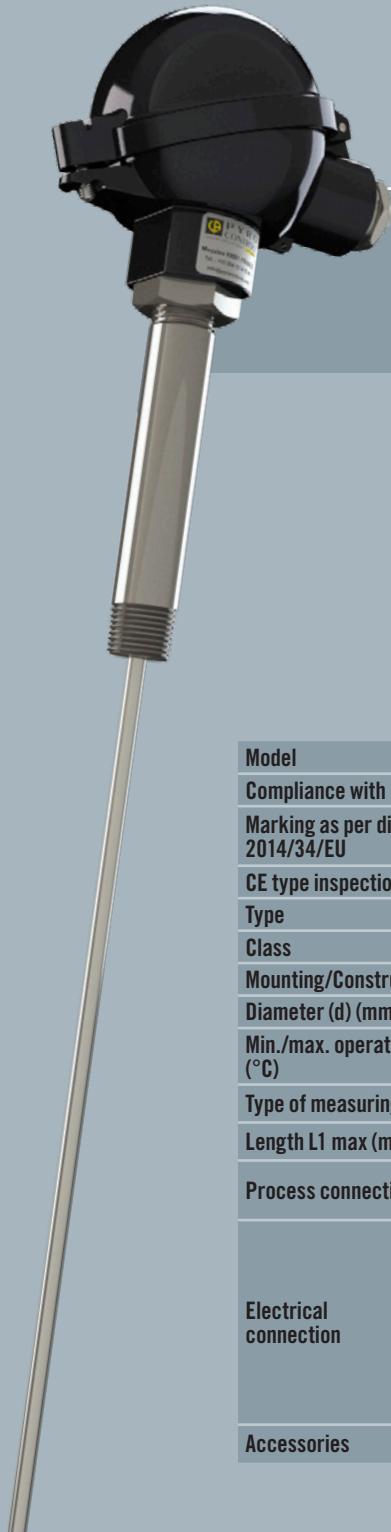

SA1D

Pt100

IP
65CLASS
AIEC
60751INTRINSIC
SAFETY

DESCRIPTION

Process sensor for use in explosive zones with a dust environment, equipped with an interchangeable measuring element. For mounting in a thermowell (see page 238).

SPECIFICATIONS

Model	SA1D	
Compliance with standards	IEC 60751 / EN 60079-0	
Marking as per directive 2014/34/EU	Ex ia IIIC T135°C...T85°C Da	
CE type inspection certificate	LCIE 14ATEX3020 X / IECEx LCIE 14.0021 X	
Type	Pt100	
Class	A	
Mounting/Construction	1x3 wires / 1x4 wires / 2x2 wires / 2x3 wires	
Diameter (d) (mm)	6 / 8	
Min./max. operating temperature (°C)	-40...+450°C	
Type of measuring element	DS... / TS...	
Length L1 max (mm)	1,500	
Process connection	Type M extension - Type RU extension (makes it easy to orient the head). Threading: 1/2" NPT. Stainless steel.	
Electrical connection	Head type	DAN-Vi
	Material	Light alloy
	Output	1 cable gland M20x1.5
	Cable diam.	5.5 to 7.5 mm
	Equipment	Ceramic terminal strip (standard) / Transmitter
	IP	IP65
Accessories	Measuring element, thermowell, cable gland	

For any other configuration, please contact us.

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	HEAD	DIAM (mm)	MOUNTING	LENGTH L1 (mm)	EXTENSION	OPTION TRANSMITTER	OPTION TRANSMITTER SCALE
SA1D							
Reference in table and diagram	1	2	3	4	5	6	

Possible choice

DAN-Vi: DVI Diam d: 6 / 8 1x3 wires: B
 1x4 wires: C
 2x2 wires: D
 2x3 wires: E

Max. 1,500 mm*

Extension type M: M Extension type RU: R

LC5333B-100: E LC5331B-321: F
 LC5335B-100: G

*2x2-wire mounting limited to 250mm


TRANSMITTER INFORMATION (1 PT100 ONLY)

6


Transmitter				
Input	Output	Galvanic insulation	ATEX	Reference
Pt100	4-20mA	NONE	ia	LC5333B-100
TC + Pt100	4-20mA	1.5kV	ia	LC5331B-321
TC + Pt100	4-20mA + HART	1.5kV	ia	LC5335B-100

CONNECTIONS

3

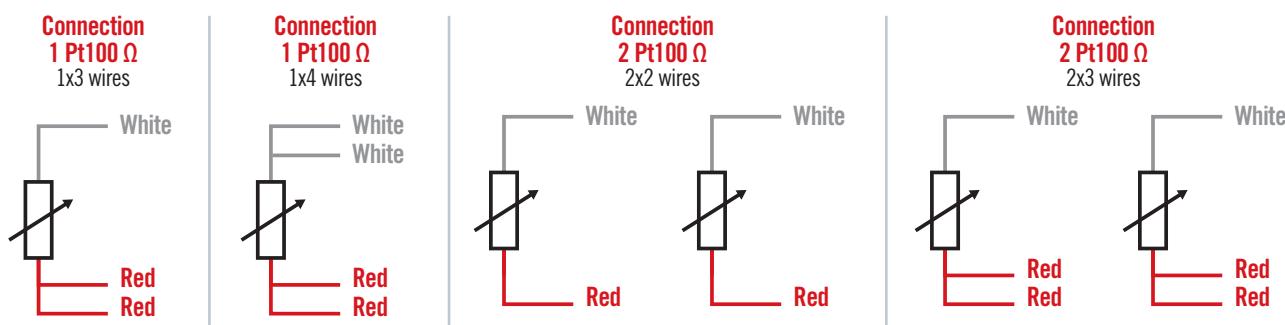

DIAGRAM

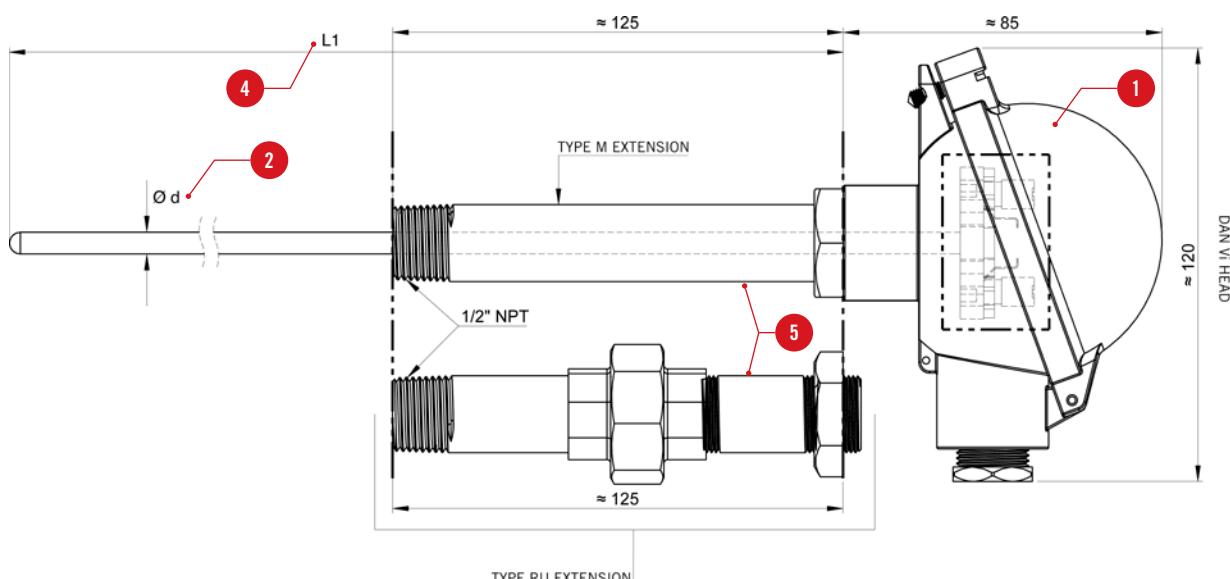



TCG3i

THERMOCOUPLE

INTRINSIC
SAFETYCLASS
1IEC
584-1PVC
CABLE
OUTPUT

DESCRIPTION

Bendable flexible sheathed thermocouple for adaptation to the application, even in confined spaces. Small-diameter sensor with a short response time. Equipped with a cable for easy connection even over long distances.

Intrinsically-safe ATEX model for use in gas zones (0, 1 and 2) and dust zones (20, 21 and 22).

Thermocouples up to 3 mm in diameter must be handled with caution to avoid any breakage.

SPECIFICATIONS

Model	TCG3i		
Compliance with standards	IEC 584-1 / EN 61515 / EN 60079-0		
Marking as per directive 2014/34/EU	II 1 GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da		
CE type inspection certificate	LCIE 14ATEX3020 X		
Type	K	J	
Material	Inconel 600		316L
Class		1	
Diameter (d) (mm)		1 / 1.5 / 2 / 3 / 4.5 / 6 / 8	
Hot junction	Insulated		
TC	Single / Duplex		
Length L max (mm)	Diam. 1 to 2 mm	100 to 36,000 mm	
	Diam.> 2 mm	100 to 30,000 mm	
Max. temp. in air (°C) in sensor sheath (without flow) (theoretical)	Diam.1 -1.5mm	650°C	260°C
	Diam. 2 mm	700°C	440°C
	Diam. 3 mm	750°C	520°C
	Diam. 4.5mm	800°C	620°C
	Diam. 6 mm	1000°C	720°C
	Diam. 8 mm	1100°C	720°C
Output	Type of cable	extension	
	Cable sheath	PVC	
	Max. temperature	105°C	
	Conductors	2 x 0.22 mm ² , PVC insulation	
	Braid	Internal, copper, connected to sensor sheath	
Accessories	Length Lc Min/ Max (mm)	200 to 10,000 mm	
	Leak-tight fittings, rotating fittings		


DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	TC TYPE	Ø SHEATH (mm)	LENGTH L (mm)	LENGTH LC (mm)	PROTECTIVE SPRING
TCG3i					
Reference in table and diagram	1	2	3	4	5
Possible choice	1J / 1K / 2J / 2K 4.5 / 6.0 / 8.0	1.0 / 1.5 / 2.0 / 3.0 Diam 3 - 4.5 - 6 - 8: 00100 to 30,000	Diam 1-1.5-2: 00100 to 36,000	Lc: 200 to 10,000 mm (standard: 2,000 mm)	Without: 0 With: 1 (standard)


DIAGRAM

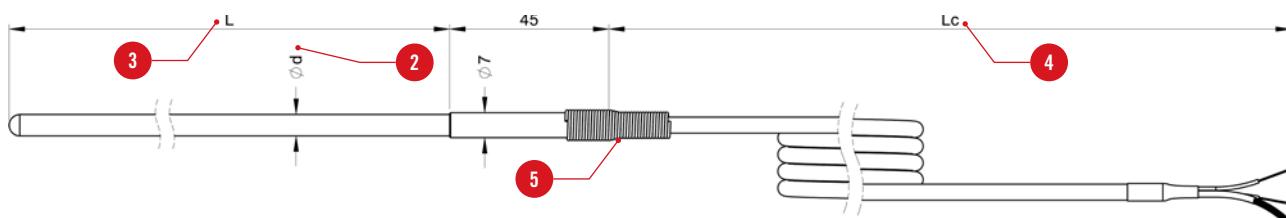

THERMOCOUPLE INFORMATION

Model	Cable	Class 1 TC	Sheath diameter (m Class 1 TC m)							2
			1	1.5	2	3	4.5	6	8	
TCG3i	PVC sheath	J	316L	316L	316L	316L	316L	316L	316L	2
		K	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	
		2J	-	316L	316L	316L	316L	316L	316L	
		2K	-	-	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	

CONNECTIONS

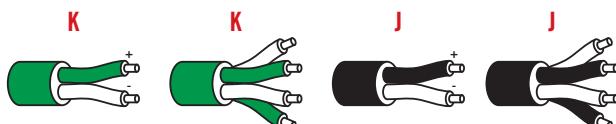

For any other configuration, please contact us.



TCG32i

THERMOCOUPLE

FEP
CABLE
OUTPUT

CLASS
1

IEC
584-1

INTRINSIC
SAFETY



DESCRIPTION

Bendable flexible sheathed thermocouple for adaptation to the application, even in confined spaces. Small-diameter sensor with a short response time. Equipped with a cable for easy connection even over long distances.

Intrinsically-safe ATEX model for use in gas zones (0, 1 and 2) and dust zones (20, 21, 22).

Thermocouples up to 3 mm in diameter must be handled with caution to avoid any breakage.

SPECIFICATIONS

Model	TCG32i	
Compliance with standards	IEC 584-1 / EN 61515 / EN 60079-0	
Marking as per directive 2014/34/EU	II 1 GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da	
CE type inspection certificate	LCIE 14ATEX3020 X	
Type	K	J
Material	Inconel 600	316L
Class	1	
Diameter (d) (mm)	1 / 1.5 / 2 / 3 / 4.5 / 6 / 8	
Hot junction	Insulated	
Thermocouple	Single / Duplex	
Length L max (mm)	Diam. 1 to 2 mm	100 to 36,000 mm
	Diam.> 2 mm	100 to 30,000 mm
Max. temp. in air (°C) in sensor sheath (without flow) (theoretical)	Diam.1 -1.5mm	650°C
	Diam. 2 mm	700°C
	Diam. 3 mm	750°C
	Diam. 4.5mm	800°C
	Diam. 6 mm	1000°C
	Diam. 8 mm	1100°C
Output	Type of cable	extension
	Cable sheath	FEP
	Max. temperature	250°C
	Conductors	2 x 0.22 mm ² , FEP insulation
	Braid	Internal, copper, connected to sensor sheath
Accessories	Length Lc Min/ Max (mm)	
	200 to 10,000 mm	
	Leak-tight fittings, rotating fittings	


DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	TC TYPE	Ø SHEATH (mm)	LENGTH L1 (mm)	LENGTH LC (mm)	PROTECTIVE SPRING
TCG32i					
Reference in table and diagram	1	2	3	4	5
Possible choice	1J / 1K / 2J / 2K 4.5 / 6.0 / 8.0	1.0 / 1.5 / 2.0 / 3.0 4.5 / 6.0 / 8.0	Diam 1-1.5-2: 00100 to 36,000 Diam 3 - 4.5 - 6 - 8: 00100 to 30,000	Lc: 200 to 10,000 mm (standard: 2,000 mm)	Without: 0 With: 1 (standard)


DIAGRAM

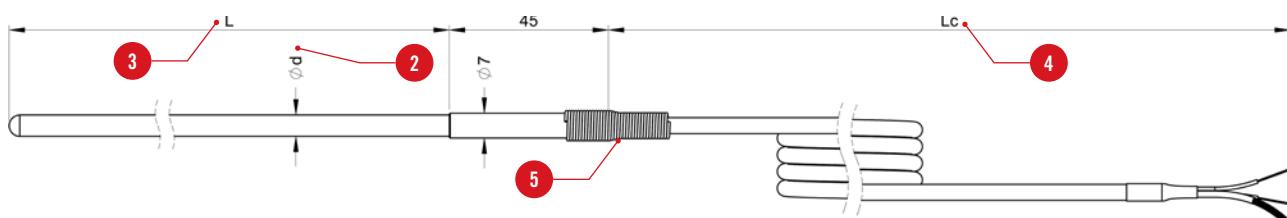

THERMOCOUPLE INFORMATION

Model	Cable	Class 1 TC	Sheath diameter (mm)						
			1	1.5	2	3	4.5	6	8
TCG32i	FEP sheath	J	316L	316L	316L	316L	316L	316L	316L
		K	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600
		2J	-	316L	316L	316L	316L	316L	316L
		2K	-	-	INCONEL600	INCONEL600	INCONEL600	INCONEL600	INCONEL600

CONNECTIONS

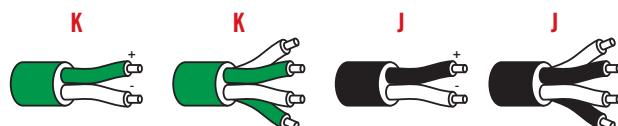

For any other configuration, please contact us.



S1i

Pt100

PVC OR FEP
OR SILICONE
CABLE
OUTPUT

**CLASS
A**

**INTRINSIC
SAFETY**

**IEC
60751**



DESCRIPTION

Sheathed Pt100 sensor, Class A as per IEC 751, with cable output, for temperature measurement up to 450°C in low-pressure and low flow-rate environments.

Intrinsically-safe ATEX model for use in gas zones (0, 1 and 2) and dust zones (20, 21 and, 22).

SPECIFICATIONS

Model	S1i			
Compliance with standards	IEC 60751 / EN 60079-0			
Marking as per directive 2014/34/EU	II 1GD / Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da			
CE type inspection certificate	LCIE 14ATEX3020 X			
Type	Pt100 Ω			
Material	316 L			
Class	A			
Mounting/Construction	Single: 1x3 wires or 1x4 wires / Duplex: 2x2 wires or 2x3 wires			
Diameter (d) (mm)	1.6 / 3 / 4.5 / 6 / 8			
Length L1 max (mm)	See table opposite			
Max. temp. in air (°C) (without flow) (theoretical)	450°C			
Output	Sheath	PVC	FEP	SILICONE
	Max. temperature	105°C	200°C	200°C
	Conductors	3, 4 or 6 x 0.22 mm, PVC insulation	3, 4 or 6 x 0.22 mm, FEP insulation	3, 4 or 6 x 0.22 mm, FEP insulation
	Shielding braid	•	•	
	Length Lc Min/ Max (mm)	200 to 10,000 mm		
	Termination	Insulated bare wires		
Accessories	Measuring element, thermowell, cable gland			

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	NO. OF PT100	MOUNTING	Ø SHEATH (mm)	LENGTH L (mm)	CABLE	LENGTH LC (mm)	PROTECTIVE SPRING
S1i	1	2	3	4	5	6	7
Reference in table and diagram	1	2	3	4	5	6	7
Possible choice	1 - 2 1x3 wires: B 1x4 wires: C 2x2 wires: D 2x3 wires: E	1.6 / 3 / 4.5 / 6 / 8	As per table below	PVC: PVC FEP: FEP Silicone: SIL	200 to 10,000 mm	Without: 0 With: 1 (standard)	


DIAGRAM




TABLE OF POSSIBLE ASSOCIATIONS

1 Number of Pt100	2 Mounting	Length L min. / max. (mm)					4
		1.6	3	4.5	6	8	
1	1x3 wires	50 / 250	50 / 1500	50 / 1500	50 / 1500	50 / 1500	50 / 1500
	1x4 wires	50 / 250	50 / 1500	50 / 1500	50 / 1500	50 / 1500	50 / 1500
2	2x2 wires	-	-	50 / 250	50 / 250	50 / 250	50 / 250
	2x3 wires	-	-	50 / 1500	50 / 1500	50 / 1500	50 / 1500

CONNECTIONS

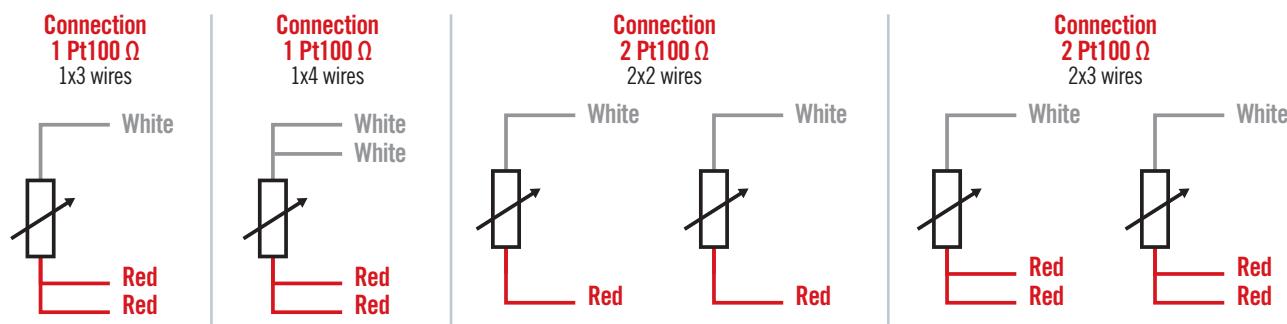

For any other configuration, please contact us.

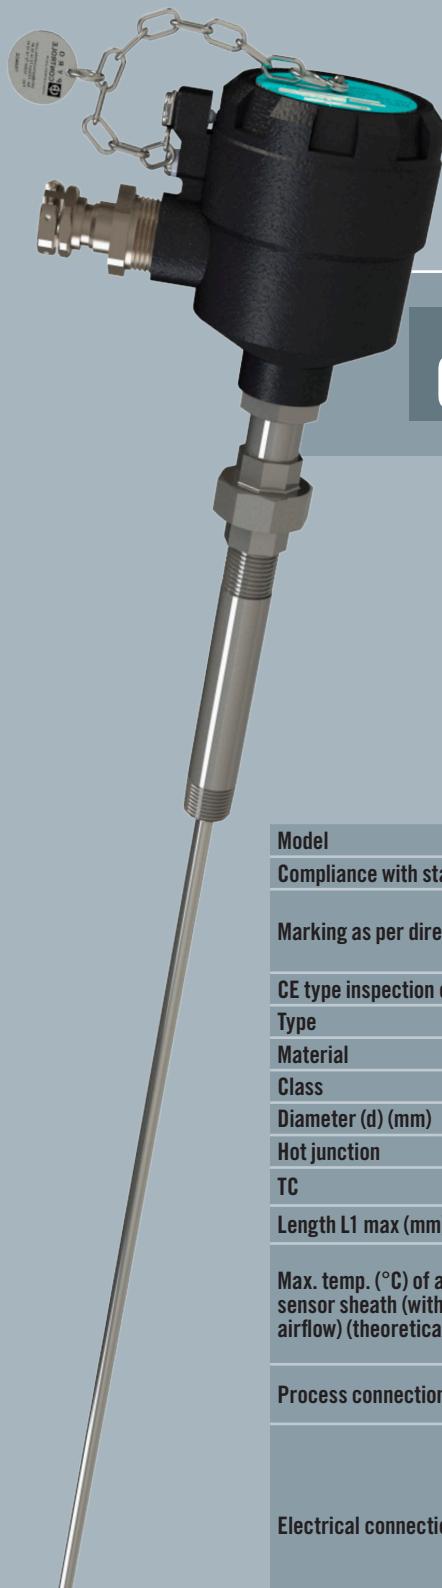

TA2D

THERMOCOUPLE

IP
65CLASS
1IEC
584-1

ANTI-EXPLOSION



DESCRIPTION

Process sensor for use in explosive zones with a dust environment, equipped with an interchangeable measuring element. For mounting in a thermowell (see page 238).

SPECIFICATIONS

Model	TA2D										
Compliance with standards	IEC 584-1 / EN 61515 / EN 60079-0										
Marking as per directive 2014/34/EU	Ex II 2 GD / Ex db IIC T6 Gb / Ex tb IIIC T85°C Db IP6X Do not open when live Do not open in the presence of dust atmospheres										
CE type inspection certificate	LCIE 15ATEX3007 X / IECEx LCIE 15.0015 X										
Type	K	J	T	N							
Material	Inconel 600	316L	316L	Inconel 600	Pyrosil						
Class	1	2		1							
Diameter (d) (mm)	6 - 8										
Hot junction	Insulated / Earthed										
TC	Single / Duplex				Single						
Length L1 max (mm)	1,500										
Max. temp. (°C) of air in sensor sheath (without airflow) (theoretical)	Diam. 6 mm	1000°C	720°C	350°C	1000°C	1100°C					
	Diam. 8 mm	1100°C	720°C	350°C	1100°C	1150°C					
Process connection		Type M extension - Type RU extension (makes it easy to orient the head). Threading: 1/2"NPT. Stainless steel.									
Electrical connection	Head type	PSX									
	Material	Epoxy-coated light alloy									
	Output	1 anti-explosion cable gland 3/4" NPT with nickel-plated brass fastening									
	Cable diam.	10.0 - 16.0 mm									
	Equipment	Ceramic terminal strip (standard) / Transmitter									
	IP	IP65									
Accessories		Measuring element, thermowell, cable gland									

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering


MODEL	HEAD	TC TYPE	SHEATH TYPE	Ø SHEATH (mm)	LENGTH L1 (mm)	HOT JUNCTION	EXTENSION	OPTION	TRANSMITTER	TRANSMITTER SCALE
TA2D										
Reference in table and diagram	1	2	3	4	5	6	7			
Possible choice	PSX	1T / 1J 1K / 1N 2K / 2J	316L: AC INCONEL 600: CM PYROSIL: DB	6 / 8	Max. 1,500 mm	Insulated: I (standard) Earthing: M	Extension type M: M Extension type RU: R	LC5334A-100: A LC5331A-321: B LC5335A-100: C		

THERMOCOUPLE INFORMATION

2	Sheath diameter (mm)		4
Class 1 TC	6	8	
T (CLASS 2)	316L	316L	
J	316L	316L	
K	INCONEL600	INCONEL600	
N	INCONEL600	-	3
	PYROSIL	PYROSIL	
2J	316L	316L	
2K	INCONEL600	INCONEL600	

ASSOCIATED CONNECTIONS ON TERMINAL STRIP

Duplex thermocouple



Single thermocouple




TRANSMITTER INFORMATION (1 TC ONLY)


7

For any other configuration, please contact us

Transmitter			
Input	Output	Galvanic insulation	Reference
TC	4-20mA	1.5kV	LC5334A-100
TC + Pt100	4-20mA	1.5kV	LC5331A-321
TC + Pt100	4-20mA + HART	1.5kV	LC5335A-100

DIAGRAM

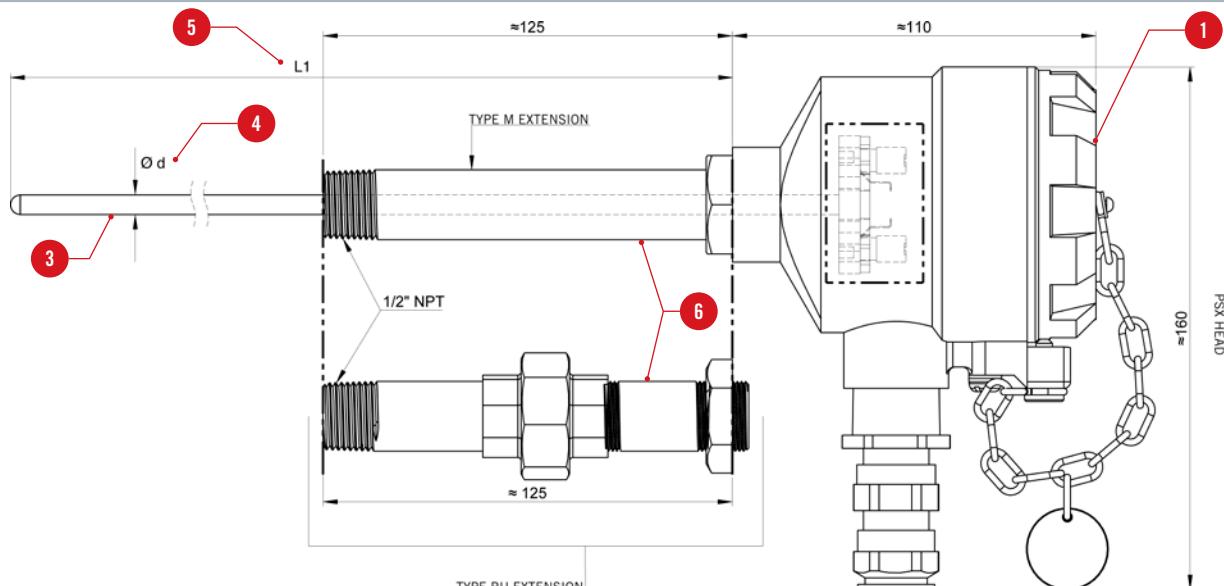

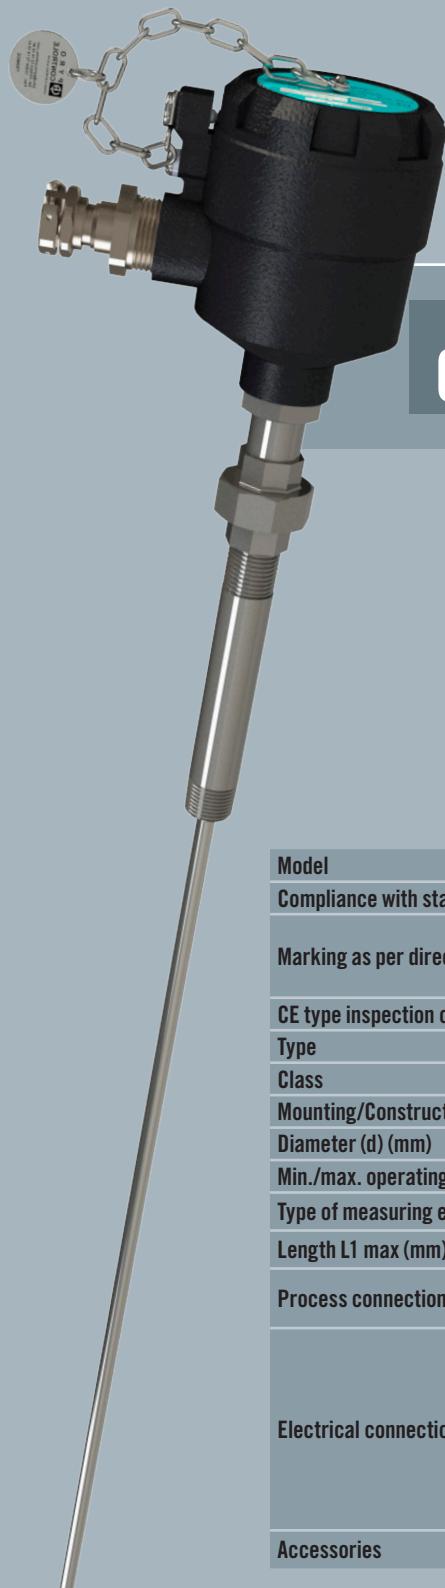


SA2D

Pt100

IP
65CLASS
AIEC
60751

ANTI-EXPLOSION



DESCRIPTION

Process sensor for use in explosive zones with a dust environment, equipped with an interchangeable measuring element. For mounting in a thermowell (see page 238).

SPECIFICATIONS

Model	SA2D	
Compliance with standards	IEC 60751 / EN 60079-0	
Marking as per directive 2014/34/EU	II 2 GD / Ex db IIC T6 Gb / Ex tb IIIC T85°C Db IP6X Do not open when live Do not open in the presence of dust atmospheres	
CE type inspection certificate	LCIE 15ATEX3007 X / IECEx LCIE 15.0015 X	
Type	Pt100	
Class	A	
Mounting/Construction	1x3 wires / 1x4 wires / 2x2 wires / 2x3 wires	
Diameter (d) (mm)	6 - 8	
Min./max. operating temp. (°C)	-40...+450°C	
Type of measuring element	DS... / TS...	
Length L1 max (mm)	1,500	
Process connection	Type M extension - Type RU extension (makes it easy to orient the head). Threading: 1/2"NPT. Stainless steel.	
Electrical connection	Head type	PSX
	Material	Epoxy-coated light alloy
	Output	1 anti-explosion cable gland 3/4" NPT with nickel-plated brass fastening
	Cable diam.	10.0 - 16.0 mm
	Equipment	Ceramic terminal strip (standard) / Transmitter
	IP	IP65
Accessories	Measuring element, thermowell, cable gland	

For any other configuration, please contact us.

DESIGN YOUR SENSOR

CONFIGURATOR CODE

Parameters to be indicated when ordering

MODEL	HEAD	\varnothing (mm)	MOUNTING	LENGTH L1 (mm)	EXTENSION	OPTION	TRANSMITTER	TRANSMITTER SCALE
SA2D								
Reference in table and diagram	1	2	3	4	5	6		

Possible choice

PSX	6 / 8	1x3 wires: B 1x4 wires: C 2x2 wires: D 2x3 wires: E	Max. 1,500 mm*	Extension type M: M Extension type RU: R	LC5333A-100: D LC5331A-321: B LC5335A-100: C
-----	-------	--	----------------	---	--

*2x2-wire mounting limited to 250mm


TRANSMITTER INFORMATION (1 PT100 ONLY)

6

Transmitter			
Input	Output	Galvanic insulation	Reference
Pt100	4-20mA	NONE	LC5333A-100
TC + Pt100	4-20mA	1.5kV	LC5331A-321
TC + Pt100	4-20mA + HART	1.5kV	LC5335A-100


CONNECTIONS

3

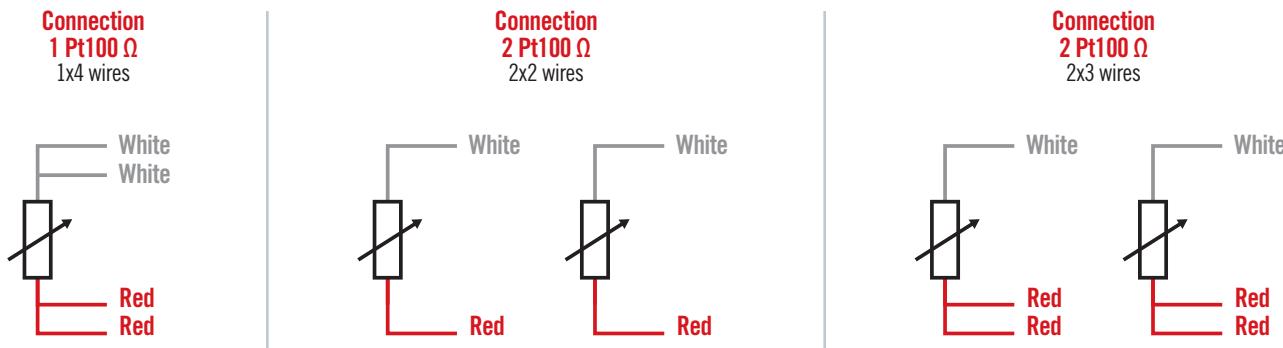

DIAGRAM

4

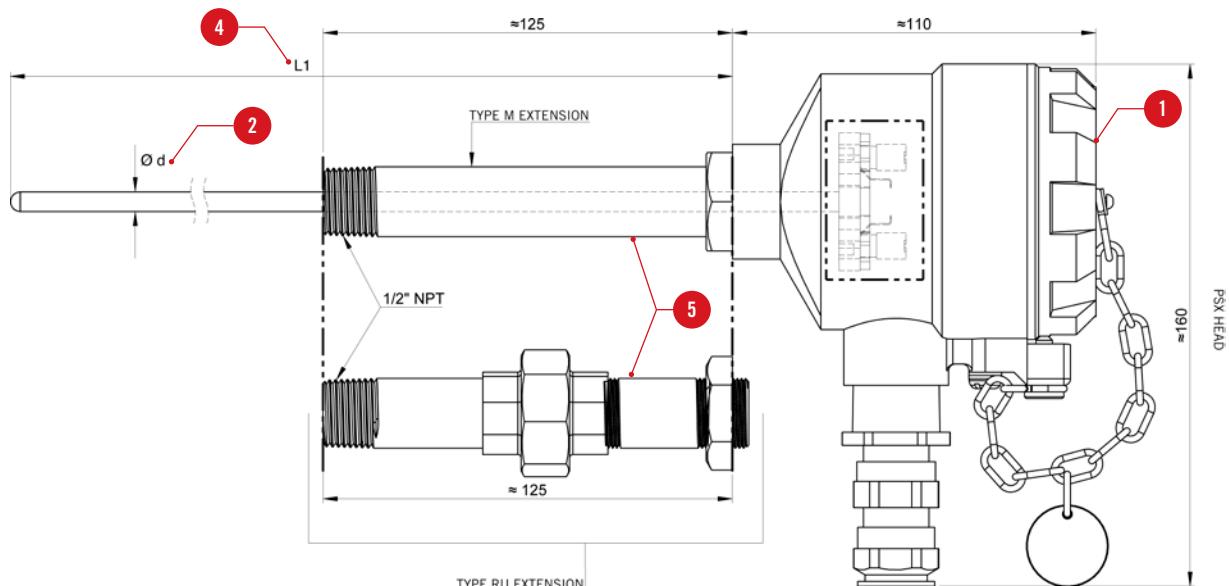





CHAUVIN ARNOUX
190, rue Championnet
75876 Paris Cedex 18 - France
Tel. : +33 1 44 85 44 85
Fax : +33 1 46 27 07 48
info@chauvin-arnoux.fr
www.chauvin-arnoux.fr



CHAUVIN ARNOUX METRIX
190, rue Championnet
75876 Paris Cedex 18 - France
Tel. : +33 1 44 85 44 85
Fax : +33 1 46 27 07 48
info@chauvin-arnoux.fr
www.chauvin-arnoux.fr



CHAUVIN ARNOUX ENERGY
16, rue Georges Besse
92182 Antony Cedex - France
Tel. : +33 1 75 60 10 30
Fax : +33 1 46 66 62 54
info@enerdis.fr
www.chauvin-arnoux-energy.com



MANUMESURE
9, allée Jean Prouvé
92110 Clichy - France
Tel. : +33 1 75 61 01 80
Fax : +33 1 47 33 28 02
info@manumesure.fr
www.manumesure.fr

YOUR CONTACTS

FRANCE

SOUTH-WEST SECTOR

Telephone: +33 (0)4 72 14 16 31
sud.est@pyrocontrole.com

WEST SECTOR

Telephone: +33 (0)4 81 76 02 55
ouest@pyrocontrole.com

ILE-DE-FRANCE/NORTH-EAST SECTOR

Telephone: +33 (0)4 81 76 02 54
idf.nord.est@pyrocontrole.com



INTERNATIONAL

PYROCONTROLE EXPORT DEPARTMENT

Telephone: +33 (0)4 72 14 15 40
export@pyrocontrole.com

10 SUBSIDIARIES WORLDWIDE

GERMANY

CHAUVIN ARNOUX GMBH

Ohmstraße 1
77694 KEHL / RHEIN
Tel.: +49 7851 99 26-0
Fax: +49 7851 99 26-60
info@chauvin-arnoux.de
www.chauvin-arnoux.de

ITALY

AMRA SPA

Via Sant'Ambrogio, 23
20846 MACHERIO (MB)
Tel. : +39 039 245 75 45
Fax : +39 039 481 561
info@amra-chauvin-arnoux.it
www.chauvin-arnoux.it

SWITZERLAND

CHAUVIN ARNOUX AG

Moosacherstrasse 15
8804 AU / ZH
Tel. : +41 44 727 75 55
Fax : +41 44 727 75 56
info@chauvin-arnoux.ch
www.chauvin-arnoux.ch

AUTRICHE

CHAUVIN ARNOUX GES.M.B.H

Slamastrasse 29/2/4
1230 WIEN
Tel. : +43 1 61 61 9 61
Fax : +43 1 61 61 9 61-61
vie-office@chauvin-arnoux.at
www.chauvin-arnoux.at

MIDDLE EAST

CHAUVIN ARNOUX MIDDLE EAST

PO Box 60-154
1241 2020 JAL EL DIB
(Beirut) - LEBANON
Tel. : +961 1 890 425
Fax : +961 1 890 424
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

USA

CHAUVIN ARNOUX INC

d.b.a AEMC Instruments
15 Faraday Drive
Dover - NH 03820
Tel. : +1 (800) 945-2362
Fax : +1 (603) 742-2346
sales@aemc.com
www.aemc.com

CHINA

SHANGHAI PU-JIANG ENERDIS INSTRUMENTS CO. LTD

N° 381 Xiang De Road
3 Floor, Building 1
200081 SHANGHAI
Tel. : +86 21 65 21 51 96
Fax : +86 21 65 21 61 07
info@chauvin-arnoux.com.cn

UNITED KINGDOM

CHAUVIN ARNOUX LTD

Unit 1 Nelson Ct, Flagship Sq
Shaw Cross Business Pk, Dewsbury
West Yorkshire - WF12 7TH
Tel. : +44 1924 460 494
Fax : +44 1924 455 328
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.com

SPAIN

CHAUVIN ARNOUX IBÉRICA SA

C/ Roger de Flor N°293
1a Planta
08025 BARCELONA
Tel. : +34 902 20 22 26
Fax : +34 934 59 14 43
info@chauvin-arnoux.es
www.chauvin-arnoux.es

SCANDINAVIA

CA MÄTSYSTEM AB

Sjöflygvägen 35
SE-183 62 TABY
Tel. : +46 8 50 52 68 00
Fax : +46 8 50 52 68 10
info@camatsystem.com
www.camatsystem.com

FRANCE

PYROCONTROLE

6 bis, av du Docteur Schweitzer
69881 Meyzieu Cedex - France
Tel. : +33 4 72 14 15 40
Fax : +33 4 72 14 15 41
info@pyrocontrole.com
www.pyrocontrole.com

MIDDLE EAST

Chauvin Arnoux Middle East

P.O. BOX 60-154
1241 2020 JAL EL DIB -
LEBANON
Tel: +961 1 890 425
Fax: +961 1 890 424
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

UNITED KINGDOM

Chauvin Arnoux Ltd

Unit 1 Nelson Ct, Flagship Sq,
Shaw Cross Business Pk
Dewsbury, West Yorkshire -
WF12 7TH
Tel: +44 1924 460 494
Fax: +44 1924 455 328
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.com