

**SS3** Pt100




## DESCRIPTION

Pt100 sensor, Class A, 4 wires, as per IEC 60751, on Dural plate, output via PTFE cable, for temperature measurement up to 200°C. Fastening by gluing or with clamping screw.

## **SPECIFICATIONS**


Model		SS3
Compliance with standards		IEC 60751
Туре		Pt100 Ω
Material		Dural plate, 30x10x4.5mm (Lxwxh)
Class		А
Mounting / Construction		1x4 wires
Max. surface temp. (°C) (without flow) (theoretical)		200°C
Output	Sheath	PTFE
	Diameter (mm)	2.8 mm
	Max. temperature	200°C
	Conductors	4 x 0.22 mm <sup>2</sup> , copper
	Length L (mm)	1,000 / 2,000 / 5,000 mm
	Termination	Insulated bare wires
Fastening		By gluing on surface or with clamping screw.

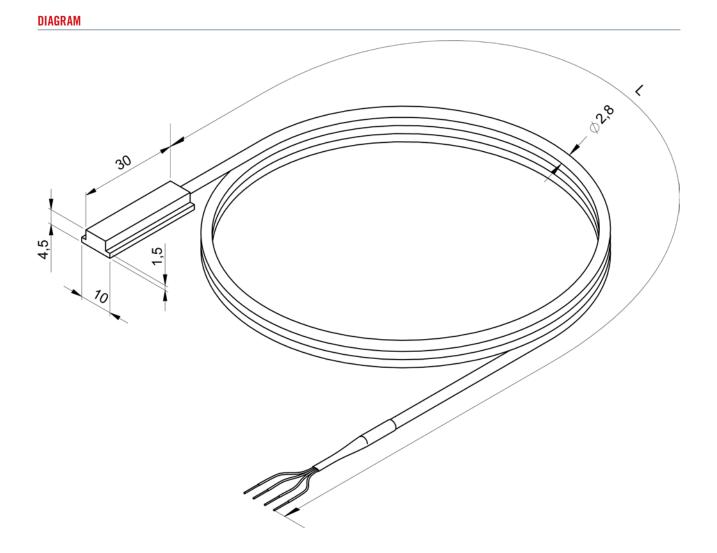

## REFERENCES

Cable length L (mm)	Reference
1000	P07604123
2000	P07604124
5000	P07604125





For any other configuration, please contact us.